

Telangana State Council Higher Education

Notations :

- 1.Options shown in green color and with ✓ icon are correct.
- 2.Options shown in red color and with ✘ icon are incorrect.

Question Paper Name :	Electronics and Communication Engineering 3rd Aug 2021 Shift1
Subject Name :	Electronics and Communication Engineering
Creation Date :	2021-08-04 15:47:34
Duration :	180
Total Marks :	200
Display Marks:	No
Calculator :	None
Magnifying Glass Required? :	No
Ruler Required? :	No
Eraser Required? :	No
Scratch Pad Required? :	No
Rough Sketch/Notepad Required? :	No
Protractor Required? :	No
Show Watermark on Console? :	Yes
Highlighter :	No
Auto Save on Console? :	Yes

Electronics and Communication Engineering

Group Number :	1
Group Id :	80089499

Group Maximum Duration :	0
Group Minimum Duration :	180
Show Attended Group? :	No
Edit Attended Group? :	No
Break time :	0
Group Marks :	200
Is this Group for Examiner? :	No

Mathematics

Section Id :	800894384
Section Number :	1
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	50
Number of Questions to be attempted :	50
Section Marks :	50
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Sub-Section Number :	1
Sub-Section Id :	800894438
Question Shuffling Allowed :	Yes

Question Number : 1 Question Id : 80089419646 Question Type : MCQ Option Shuffling : Yes
Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical
Correct Marks : 1 Wrong Marks : 0

If $A = \begin{bmatrix} 1 & 0 & 0 \\ 1 & 0 & 1 \\ 0 & 1 & 0 \end{bmatrix}$, then $A^{50} =$

Options :

1. ✘ $\begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$

2. ✔ $\begin{bmatrix} 1 & 0 & 0 \\ 25 & 1 & 0 \\ 25 & 0 & 1 \end{bmatrix}$

3. ✘ $\begin{bmatrix} 1 & 0 & 0 \\ 24 & 1 & 0 \\ 24 & 0 & 1 \end{bmatrix}$

4. ✘ $\begin{bmatrix} 1 & 0 & 0 \\ 50 & 1 & 0 \\ 50 & 0 & 1 \end{bmatrix}$

Question Number : 2 Question Id : 80089419647 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $a + b + c = 0$, $\begin{vmatrix} ax & by & cz \\ bz & cx & ay \\ cy & az & bx \end{vmatrix} = k \begin{vmatrix} x & y & z \\ z & x & y \\ y & z & x \end{vmatrix} = abc(x^3 + y^3 + z^3) - xyz(a^3 + b^3 + c^3)$, then $k =$

Options :

1. ✘ xyz

2. ✔ abc

3. ✘ $x + y + z$

4. ✘ 0

Question Number : 3 Question Id : 80089419648 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Consider the statements with reference to the 3×3 matrices A and B and k is a constant .

I) $A = kB \Rightarrow |A| = k|B|$.

II) $\text{adj}(AB) = \text{adj}(B) \text{adj}(A)$.

III) for a matrix C, if $A=BC \Rightarrow C=B^{-1}A$

Which of the above statements are correct?

Options :

1. ✘ Only I and II are correct

2. ✔ Only II is correct

3. ✘ Only III is correct

4. ✘ Only II and III are correct

Question Number : 4 Question Id : 80089419649 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If the solution of the system of equations $x - y + z = 4, 2x + y - 3z = 0, x + y + z = 2$ is (x, y, z) ,

then $x+y+z=$

Options :

1. ✘ 0

2. ✘ 3

3. ✓ 2

4. ✗ 4

Question Number : 5 Question Id : 80089419650 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $\frac{3x-2}{(x+1)(2x^2+3)} = \frac{A}{x+1} - \frac{Bx+C}{2x^2+3}$, then $A + B + C =$

Options :

1. ✗ 2

2. ✓ -4

3. ✗ 0

4. ✗ -2

Question Number : 6 Question Id : 80089419651 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $y = \frac{a^x + a^{-x}}{2}$, $x > 0$ and $a > 1$ then $x =$

Options :

1. ✗ $\frac{a^y - a^{-y}}{2}$

2. ✓

$$\log_a(y + \sqrt{y^2 - 1})$$

3. ✘ $\log_a\left(\frac{y - \sqrt{y^2 - 1}}{2}\right)$

4. ✘ $\log_{1/a} y$

Question Number : 7 Question Id : 80089419652 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

If $a^{2019-x} \cdot b^{2021x} = a^{x+2021} \cdot b^{2019x}$, then $x =$

Options :

1. ✘ $\log\left(\frac{b}{a}\right) b$

2. ✘ $\log\left(\frac{a}{b}\right) b$

3. ✔ $\log\left(\frac{b}{a}\right) a$

4. ✘ $\log\left(\frac{a}{b}\right) a$

Question Number : 8 Question Id : 80089419653 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

If $\tan \theta = \frac{p}{q}$ then $\frac{p \sin \theta - q \cos \theta}{p \sin \theta + q \cos \theta} =$

Options :

1. ✘ $\frac{p-q}{p+q}$

2. ✘ $\frac{p^2-q}{p+q^2}$

3. ✔ $\frac{p^2-q^2}{p^2+q^2}$

4. ✘ $\frac{2p}{p+q}$

Question Number : 9 Question Id : 80089419654 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If the area of a triangle is 75 sq.cm and two of its sides are 20 cm and 15 cm, then the included angle between the sides is

Options :

1. ✘ 60° or 120°

2. ✔ 30° or 150°

3. ✘ 45° or 135°

4. ✘ 90° or 135°

Question Number : 10 Question Id : 80089419655 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $\cosh 2x = 99$, then $\coth x =$

Options :

1. ✘ $\frac{5}{7\sqrt{2}}$

2. ✔ $\frac{10}{7\sqrt{2}}$

3. ✘ $\frac{10}{2\sqrt{7}}$

4. ✘ $\frac{5}{2\sqrt{7}}$

Question Number : 11 Question Id : 80089419656 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

A complex number 'z' having least modulus value and satisfying $|z - 2 + 2i| = 1$ is

Options :

1. ✘ $\left(2 - \frac{1}{\sqrt{2}}\right)(1 + i)$

2. ✘ $\left(2 + \frac{1}{\sqrt{2}}\right)(1 + i)$

3. ✔ $\left(2 - \frac{1}{\sqrt{2}}\right)(1 - i)$

4. ✘ $\left(2 + \frac{1}{\sqrt{2}}\right)(1 - i)$

Question Number : 12 Question Id : 80089419657 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $\frac{(1+i)x-2i}{3+i} + \frac{(2-3i)y+i}{3-i} = 1$, then $x + y =$

Options :

1. ✘ $\frac{75}{67}$

2. ✘ $\frac{18}{37}$

3. ✘ $\frac{57}{35}$

4. ✔ $\frac{66}{23}$

Question Number : 13 Question Id : 80089419658 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

$\left(\frac{\sqrt{3}+i}{2}\right)^6 + \left(\frac{\sqrt{3}-i}{2}\right)^6 =$

Options :

1. ✔ -2

2. ✘ -4

3. ✘ -6

4. ✘ -8

Question Number : 14 Question Id : 80089419659 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

If the equation of the straight line $x + y + 1 = 0$ is changed into the form $x \cos \alpha + y \sin \alpha = p$, ($p > 0$), then $\alpha =$

Options :

1. ✘ $\frac{\pi}{4}$

2. ✘ $\frac{3\pi}{4}$

3. ✔ $\frac{5\pi}{4}$

4. ✘ $\frac{7\pi}{4}$

Question Number : 15 Question Id : 80089419660 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

GCD of p, q, r is 1. If the line $px + qy + r = 0$ is passing through the point $(4,3)$ the sum of the intercepts made by the line on the coordinate axes is 14, then a value of $p + q + r =$

Options :

1. ✘ -25

2. ✘ -23

3. ✔ -17

4. ✘ 31

Question Number : 16 Question Id : 80089419661 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The distance between the parallel lines $3x - 4y + 20 = 0$, $3x - 4y + 5 = 0$ is

Options :

1. ✘ 15 units

2. ✘ 20 units

3. ✔ 3 units

4. ✘ 5 units

Question Number : 17 Question Id : 80089419662 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The distance between the centers of the two circles touching the coordinate axes and the line $3x + 4y = 12$ in the first quadrant is

Options :

1. ✘ $5\sqrt{3}$

2. ✘ $2\sqrt{5}$

3. ✘ $3\sqrt{5}$

4. ✔ $5\sqrt{2}$

Question Number : 18 Question Id : 80089419663 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The equation of a tangent to the circle $x^2 + y^2 - 2x + 8y - 23 = 0$ having slope 3 is

Options :

1. ✘ $6x - 2y + 25 = 0$

2. ✘ $3x - y + 27 = 0$

3. ✘ $3x - y + 23 = 0$

4. ✔ $3x - y + 13 = 0$

Question Number : 19 Question Id : 80089419664 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The interval in which the value of λ lies, if the line $3x - 4y = \lambda$ cuts the circle $x^2 + y^2 - 4x - 8y = 5$ at two points is

Options :

1. ✘ $(15, 35)$

2. ✘ (35, 15)

3. ✔ (-35, 15)

4. ✘ (-15, 35)

Question Number : 20 Question Id : 80089419665 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

For $A \neq 0$ $\lim_{n \rightarrow \infty} \left(\frac{A + e^{nx}}{x + Ae^{nx}} \right) =$

Options :

1. ✘ 1, when $x > 0$

2. ✔ $\frac{A}{x}$, when $x < 0$

3. ✘ $\frac{A}{x}$, when $x > 0$

4. ✘ 0, when $x \in \mathbb{R}$

Question Number : 21 Question Id : 80089419666 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Let f be a differentiable function such that $f(x + y) = f(x) \cdot f(y), \forall x, y \in \mathbb{R}$. If $f'(0) = -3$ and $f(5) = 9$,

then $f'(5) =$

Options :

1. ✓ -27

2. ✗ 6

3. ✗ $-\frac{1}{3}$

4. ✗ -3

Question Number : 22 Question Id : 80089419667 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $y = x^{-x}$ then $\frac{x}{y} \frac{d^2y}{dx^2} + 1 =$

Options :

1. ✗ x

2. ✗ y^2

3. ✓ $y(1 + \log_e x)^2$

4. ✗ $(1 + \log_e x)$

Question Number : 23 Question Id : 80089419668 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The angle of intersection between the curves $x^2 + y^2 = 36\sqrt{2}$ and $x^2 - y^2 = 36$, is

Options :

1. ✘ $\frac{\pi}{6}$

2. ✔ $\frac{\pi}{4}$

3. ✘ $\frac{\pi}{3}$

4. ✘ $\frac{\pi}{12}$

Question Number : 24 Question Id : 80089419669 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If m is the slope of a tangent to the curve $e^y = 1 + x^2$, then

Options :

1. ✘ $|m| > 1$

2. ✘ $m > 1$

3. ✘ $m > -1$

4. ✔ $|m| \leq 1$

Question Number : 25 Question Id : 80089419670 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The maximum and minimum values of the function $f(x) = x^3 - 18x^2 + 96x + 4$ are M and m respectively, then $M-m=$

Options :

1. ✓ 32

2. ✗ 22

3. ✗ 42

4. ✗ 52

Question Number : 26 Question Id : 80089419671 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $u = \log\left(\frac{x^2+y^2}{x^5+y^5}\right)$, then $\left(x\frac{\partial u}{\partial x} + y\frac{\partial u}{\partial y}\right) =$

Options :

1. ✗ e^u

2. ✓ -2

3. ✗ $\log(u)$

4. ✗ 1

Question Number : 27 Question Id : 80089419672 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $f(t) = 1 + t^2 + t^4 + t^6$, then $\int f(\tan x) dx =$

Options :

1. ✘ $x + \frac{(\tan x)^3}{3} + \frac{(\tan x)^5}{5} + \frac{(\tan x)^7}{7} + c$

2. ✔ $\tan x + \frac{(\tan x)^5}{5} + c$

3. ✘ $(\tan x)^2 + \frac{(\tan x)^5}{5} + c$

4. ✘ $\tan x + \frac{(\tan x)^3}{3} + \frac{(\tan x)^5}{5} + \frac{(\tan x)^7}{7} + c$

Question Number : 28 Question Id : 80089419673 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $\int ((1+x)\sin x + (1-x)\cos x) dx = A(\sin x - \cos x) + f(x)(\sin x + \cos x) + C$, then $A f(x) =$

Options :

1. ✘ $3x$

2. ✘ $3 \sin x$

3. ✔ $-2x$

4. ✘ $2x + \sin x$

Question Number : 29 Question Id : 80089419674 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

$$\text{If } \int x^5 e^{x^2} dx = \frac{1}{2} e^{x^2} f(x) + c \text{ then } f(2) =$$

Options :

1. ✘ 8

2. ✘ 9

3. ✔ 10

4. ✘ 12

Question Number : 30 Question Id : 80089419675 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

$$\lim_{n \rightarrow \infty} \frac{1}{n} \left(\sin\left(\frac{1}{n}\right) + \sin\left(\frac{2}{n}\right) + \sin\left(\frac{3}{n}\right) + \dots + \sin(1) \right) =$$

Options :

1. ✘ $\cos(1)$

2. ✘ $\cos\left(\frac{1}{2}\right)$

3. ✔ $2\sin^2\left(\frac{1}{2}\right)$

4. ✘ $\log 2$

Question Number : 31 Question Id : 80089419676 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The area bounded by the curve $y = (x - 1)(x - 2)(x - 3)$ and x -axis lying between $x = 1$ and $x = 3$ is

Options :

1. ✘ $\frac{5}{2}$

2. ✘ $\frac{11}{2}$

3. ✔ $\frac{1}{2}$

4. ✘ $\frac{7}{4}$

Question Number : 32 Question Id : 80089419677 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The area of the region bounded by the curves $y = \sin x$ and $y = \cos x$, x -axis, $x=0$ and $x=\frac{\pi}{2}$ is

Options :

1. ✘ twice the area between $y = (\sin x - \cos x)$, x -axis, $x=0$ and $x=\frac{\pi}{4}$

2. ✘ equal to the area between $y = \sin x$, x -axis, $x=0$ and $x=\frac{\pi}{4}$

3. ✘

equal to the area between $y = (\sin x + \cos x)$, x-axis, $x=0$ and $x=\frac{\pi}{2}$

4. ✓ twice the area between $y = \sin x$, x-axis, $x=0$ and $x=\frac{\pi}{4}$

Question Number : 33 Question Id : 80089419678 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The value of a function f at different points are given in the following table

x	0	1	2	3	4	5	6
f(x)	0	1	1.414	1.732	2	2.236	2.449

The approximate value of $\int_0^6 f(x) dx =$

Options :

1. ✘ 8.516

2. ✓ 9.716

3. ✘ 9.125

4. ✘ 9.203

Question Number : 34 Question Id : 80089419679 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

If p and q respectively are order and degree of the differential equation $y^2 \left(\frac{d^2y}{dx^2} \right) + 3x \left(\frac{dy}{dx} \right)^{\frac{1}{3}} = \sin x - x^2 y^2$, then pq =

Options :

1. ✘ 2
2. ✔ 6
3. ✘ 15
4. ✘ 12

Question Number : 35 Question Id : 80089419680 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The equation of the curve passing through the origin and satisfying the differential equation $\frac{dy}{dx} = \frac{x-y}{x+y}$ is

Options :

1. ✔ $x^2 - y^2 - 2xy = 0$
2. ✘ $x^2 - y^2 + 2xy = 0$
3. ✘ $x^2 + y^2 - 2xy = 0$
4. ✘ $x^2 + y^2 + 2xy = 0$

Question Number : 36 Question Id : 80089419681 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The solution of the differential equation $\frac{dy}{dx} - ky = 0, y(0) = 1$, approach zero as $x \rightarrow \infty$, when

Options :

1. ✘ $k = 0$

2. ✘ $k > 0$

3. ✔ $k < 0$

4. ✘ k is any real number

Question Number : 37 Question Id : 80089419682 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The general solution of the differential equation $x \frac{dy}{dx} + y = x^3 y^6$ is

Options :

1. ✘ $(5x^3 - cx^5)y^5 = 2$

2. ✘ $(5x^5 - cx^3)y^5 = 2$

3. ✘ $(5x^5 + cx^3)y^5 = 2$

4. ✔ $(5x^3 + cx^5)y^5 = 2$

Question Number : 38 Question Id : 80089419683 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If the particular integral of $\frac{d^2y}{dx^2} - 6\frac{dy}{dx} + 13y = 8e^{3x} \sin 2x$ is equal to $f(x)$ times the particular

integral of $\frac{d^2y}{dx^2} + 4y = \sin 2x$, then $f(x) =$

Options :

1. ✘ e^{2x}
2. ✔ $8e^{3x}$
3. ✘ $8 \sin 2x$
4. ✘ $8e^{3x} \sin 2x$

Question Number : 39 Question Id : 80089419684 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The particular integral of $\frac{d^2y}{dx^2} + 4y = -4 \cos 2x$ is

Options :

1. ✔ $-x \sin 2x$
2. ✘ $\frac{-x \sin 2x}{2}$
3. ✘ $\frac{-x \cos 2x}{2}$
4. ✘ $-x \cos 2x$

Question Number : 40 Question Id : 80089419685 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The Laplace transform of the function $f(t) = |t - 1| + |t + 1|, t \geq 0$ is

Options :

1. ✘ $\frac{2}{s}(s + e^{-s})$

2. ✔ $\frac{2}{s^2}(s + e^{-s})$

3. ✘ $\frac{2}{s^2}(s - e^{-s})$

4. ✘ $\frac{2}{s}(s - e^{-s})$

Question Number : 41 Question Id : 80089419686 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $L\{F(t)\} = \frac{2s+5}{s^2+2s-3}$ then $L\{F(2t)\} =$

Options :

1. ✔ $\frac{2s+10}{s^2+4s-12}$

2. ✘ $\frac{2s+10}{s^2+4s+12}$

3. ✘ $\frac{2s+10}{s^2+6s-12}$

4. ✘ $\frac{s+5}{s^2+4s-12}$

Question Number : 42 Question Id : 80089419687 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $f(t) = \sin t + (\sin 2t - \sin t)u(t - \pi) + (\sin 3t - \sin 2t)u(t - 2\pi)$ where $u(t - a)$ is a unit step

function, then $f(t)$ when $\pi \leq t \leq 2\pi$ is

Options :

1. ✘ $\sin t$

2. ✔ $\sin 2t$

3. ✘ $\sin 3t$

4. ✘ $\sin t + \sin 2t$

Question Number : 43 Question Id : 80089419688 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The Laplace transform of $f(t) = \begin{cases} 0, & 0 < t \leq 1 \\ (t - 1), & 1 < t < 2 \\ 1, & t \geq 2 \end{cases}$

Options :

1. ✘

$$\frac{e^{-s} + e^{-2s}}{s^2}$$

2. ✘ $\frac{e^{-s} - e^{-2s}}{s}$

3. ✔ $\frac{e^{-s} - e^{-2s}}{s^2}$

4. ✘ $\frac{e^{-2s} - e^{-s}}{s^2}$

Question Number : 44 Question Id : 80089419689 Question Type : MCQ Option Shuffling : Yes
Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical
Correct Marks : 1 Wrong Marks : 0

$$L^{-1} \left\{ \frac{3s+1}{(s+1)^4} \right\} = e^{-t} F(t) \text{ then } F(1) =$$

Options :

1. ✘ $\frac{1}{6}$

2. ✘ $\frac{1}{3}$

3. ✔ $\frac{7}{6}$

4. ✘ $\frac{5}{6}$

Question Number : 45 Question Id : 80089419690 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $L(f(t)) = \left\{ \frac{1}{(s+4)^{5/2}} \right\}$, then $f(t)$ is

Options :

1. ✓ $\frac{4}{3\sqrt{\pi}} e^{-4t} t^{3/2}$

2. ✗ $\frac{4}{3\sqrt{\pi}} t^{3/2}$

3. ✗ $\frac{4}{3\sqrt{\pi}} e^{4t} t^{3/2}$

4. ✗ $\frac{4}{3\sqrt{\pi}} e^{-4t} t^{5/2}$

Question Number : 46 Question Id : 80089419691 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $y = y(t)$ satisfies the differential equation $y''' + 2y'' - y' - 2y = 0$ together with the conditions

$y(0) = y'(0) = 0, y''(0) = 3$, then the Laplace transform of $y(t)$ is equal to

Options :

1. ✗ $\frac{3}{(s^2-1)(s-2)}$

2. ✓ $\frac{3}{(s^2-1)(s+2)}$

3. ✘ $\frac{3}{(s^2+1)(s+2)}$

4. ✘ $\frac{3}{(s^2+1)(s-2)}$

Question Number : 47 Question Id : 80089419692 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Let $f(x) = e^{2x}$ in $(-\pi, \pi)$ and $f(x + 2\pi) = f(x), \forall x$. If the Fourier series expansion of the function is

$$f(x) = \sum_{n=0}^{\infty} (a_n \cos nx + b_n \sin nx) \text{ then } a_0 =$$

Options :

1. ✘ $\frac{\sinh 2\pi}{8\pi}$

2. ✘ $\frac{\sinh 2\pi}{\pi}$

3. ✘ $\frac{\sinh 2\pi}{4\pi}$

4. ✔ $\frac{\sinh 2\pi}{2\pi}$

Question Number : 48 Question Id : 80089419693 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $f(x) = \begin{cases} 0, & \text{if } -\pi \leq x \leq 0 \\ \sin x, & \text{if } 0 \leq x \leq \pi \end{cases}$, $f(x + 2\pi) = f(x), \forall x$ and $f(x) = \sum_{n=0}^{\infty} (a_n \cos nx + b_n \sin nx)$, then

$$b_1 + b_2 + b_3 =$$

Options :

1. ✘ 0

2. ✘ -1

3. ✔ $\frac{1}{2}$

4. ✘ $\frac{1}{4}$

Question Number : 49 Question Id : 80089419694 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If $f(x)$ is periodic function defined on $-p \leq x \leq p$, then the coefficient of $\cos \frac{n\pi x}{p}$ in the Fourier series expansion of $f(x)$ is

Options :

1. ✘ $\frac{1}{p} \int_{-p}^p f(x) \cos nx dx$

2. ✘ $\frac{1}{2p} \int_{-p}^p f(x) \cos \frac{nx}{p} dx$

3. ✘ $\frac{2}{p} \int_0^p f(x) \cos \frac{n\pi x}{p} dx$

4. ✓ $\frac{1}{p} \int_{-p}^p f(x) \cos \frac{n\pi x}{p} dx$

Question Number : 50 Question Id : 80089419695 Question Type : MCQ Option Shuffling : Yes
 Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical
 Correct Marks : 1 Wrong Marks : 0

If $f(x) = |\cos x|, x \in (-\pi, \pi)$ and $f(x) = \sum_{n=0}^{\infty} (a_n \cos nx + b_n \sin nx)$, then $a_0 + b_1 =$

Options :

1. ✗ $\frac{-4}{\pi^2}$

2. ✓ $\frac{2}{\pi}$

3. ✗ $\frac{4}{\pi}$

4. ✗ $\frac{-2}{\pi^2}$

Physics

Section Id :	800894385
Section Number :	2
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	25
Number of Questions to be attempted :	25
Section Marks :	25
Enable Mark as Answered Mark for Review and	Yes

Clear Response :

Sub-Section Number :

1

Sub-Section Id :

800894439

Question Shuffling Allowed :

Yes

Question Number : 51 Question Id : 80089419696 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The dimensional formulae of the following pair of physical quantities are same

Options :

1. ✘ Heat and Temperature

2. ✘ Work and Power

3. ✔ Work and Energy

4. ✘ Power and Energy

Question Number : 52 Question Id : 80089419697 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

In the phenomenon of photo electric effect, the number of photo electrons emitted is proportional to

Options :

1. ✔ The intensity of radiation

2. ✘ The frequency of radiation

3. ✘ The velocity of incident radiation

4. ✘ The work-function of cathode material

Question Number : 53 Question Id : 80089419698 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The superconducting state is perfectly _____ in nature

Options :

1. ✔ Diamagnetic

2. ✘ Paramagnetic

3. ✘ Ferromagnetic

4. ✘ Non-magnetic

Question Number : 54 Question Id : 80089419699 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

An ideal gas at temperature T is compressed through an isochoric process until its pressure is doubled

What is the final temperature

Options :

1. ✔ $2T$

2. ✘ $T/2$

3. ✘ T

4. ✘ $3T$

Question Number : 55 Question Id : 80089419700 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Match the following lists

List-I

- A. Isochoric process
- B. Isobaric process
- C. Isothermal process
- D. Adiabatic process

List-II

- i. Pressure remains constant
- ii. Temperature remains constant
- iii. Heat remains constant
- iv. Volume remains constant

Options :

1. ✘ A-i, B-ii, C-iii, D-iv

2. ✘ A-iv, B-ii, C-iii, D-i

3. ✘ A-iv, B-iii, C-ii, D-i

4. ✔ A-iv, B-i, C-ii, D-iii

Question Number : 56 Question Id : 80089419701 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The difference between two specific heats, C_p and C_v for a gas represents

Options :

1. ✘ Increase in kinetic energy of gas molecules
2. ✘ Increase in potential energy of gas molecules
3. ✔ External work done
4. ✘ Internal work done

Question Number : 57 Question Id : 80089419702 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Two vectors of equal magnitude R make an angle 60 degrees with each other. What is the magnitude of their resultant?

Options :

1. ✘ $R/\sqrt{2}$
2. ✘ $2\sqrt{2} R$
3. ✘ $\sqrt{2} R$
4. ✔ $\sqrt{3} R$

Question Number : 58 Question Id : 80089419703 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If \mathbf{i} and \mathbf{j} represent unit vectors in East and North directions, then the vector $\mathbf{i} - \mathbf{j}$ is in the direction of

Options :

1. ✘ North-East
2. ✘ North-West
3. ✔ South-East
4. ✘ South-West

Question Number : 59 Question Id : 80089419704 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If θ is the angle between two vectors \vec{a} and \vec{b} , then $|\vec{a} \cdot \vec{b}| = |\vec{a} \times \vec{b}|$, when θ is equal to

Options :

1. ✘ 0
2. ✔ $\frac{\pi}{4}$
3. ✘ $\frac{\pi}{2}$
4. ✘ π

Question Number : 60 Question Id : 80089419705 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

A stone of mass 10 gm is horizontally thrown from a cliff of height 500 m with an initial velocity 100 m/s. Time taken to reach the ground. [Take $g = 10 \text{ m/s}^2$, and neglect air resistance].

Options :

1. ✘ $\sqrt{80} \text{ s}$

2. ✘ 40 s

3. ✘ 20 s

4. ✔ 10 s

Question Number : 61 Question Id : 80089419706 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The maximum height a football reaches if it is kicked with a velocity 40 m/s at an angle 30 degrees with the horizontal. (Take $g = 10 \text{ m/s}^2$)

Options :

1. ✘ 60 m

2. ✘ 40 m

3. ✔ 20 m

4. ✘ 10 m

Question Number : 62 Question Id : 80089419707 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which of the following produces least friction?

Options :

1. ✘ Sliding friction
2. ✘ Composite friction
3. ✔ Rolling friction
4. ✘ Static friction

Question Number : 63 Question Id : 80089419708 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Two cars of unequal masses, having similar tyres, are moving on horizontal surface with the same initial speed. The minimum stopping distance is

Options :

1. ✘ smaller for lighter car
2. ✘ smaller for heavier car
3. ✘ depends on the volume of the car
4. ✔ same for both the cars

Question Number : 64 Question Id : 80089419709 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

What is the work done by an engine which lifts a mass of 100 kg through a height of 10 cm

[Take $g = 10 \text{ m/s}^2$]

Options :

1. ✓ 100 J

2. ✗ 1000J

3. ✗ 10,000 J

4. ✗ 1 J

Question Number : 65 Question Id : 80089419710 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If a light body and a heavy body have equal momentum, then

Options :

1. ✓ The lighter body has greater energy than the heavier body

2. ✗ The lighter body has lesser kinetic energy than the heavier body

3. ✗ The kinetic energy of the lighter body is equal to the kinetic energy of the heavier body

4. ✗ The kinetic energy of both the bodies are independent of momentum

Question Number : 66 Question Id : 80089419711 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

In simple harmonic motion, the restoring force must be proportional to

Options :

1. ✘ Amplitude
2. ✘ Frequency
3. ✘ Velocity
4. ✔ Displacement

Question Number : 67 Question Id : 80089419712 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The time period of the particle executing simple harmonic motion as per the equation

$$x = (25 \text{ m}) \sin [(2 \pi \text{ s}^{-1}) t + \pi / 2].$$

Options :

1. ✔ 1 s
2. ✘ 2 s
3. ✘ 3 s
4. ✘ 4 s

Question Number : 68 Question Id : 80089419713 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

What is the length of a simple pendulum that has a period of 10 s ?

Options :

1. ✘ 24.84 cm

2. ✘ 2.484 cm

3. ✘ 2.484 m

4. ✔ 24.84 m

Question Number : 69 Question Id : 80089419714 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The intensity of sound is measured in the units of

Options :

1. ✘ Joule

2. ✘ Ampere

3. ✔ Decibel

4. ✘ Volt

Question Number : 70 Question Id : 80089419715 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

According to Sabine the reverberation time is

Options :

1. ✓ Proportional to the volume of the hall and inversely proportional to the total absorption
2. ✗ Proportional to the total absorption and inversely proportional to the volume of the hall
3. ✗ Proportional to both volume of the hall and total absorption
4. ✗ Independent of volume of the hall and total absorption

Question Number : 71 Question Id : 80089419716 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

When the deforming forces are removed, if a body remains in the deformed state and does not even partially regain its original shape it is called

Options :

1. ✗ Elastic body
2. ✗ Perfectly elastic body
3. ✓ Inelastic body

4. ✓ Plastic body

Note: For this question, ambiguity is found in question/answer. Candidate will get full marks for this question if any of the correct options are chosen.

Question Number : 72 Question Id : 80089419717 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The viscosity of a gas _____

Options :

1. ✗ Decreases with increase in temperature
2. ✓ Increases with increase in temperature
3. ✗ Is independent of temperature
4. ✗ is independent of pressure for very high pressure intensities

Question Number : 73 Question Id : 80089419718 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Ohm's law is not applicable to _____

Options :

1. ✗ DC circuits
2. ✗ High currents

3. ✘ Small resistors


4. ✔ Semiconductors

Question Number : 74 Question Id : 80089419719 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Assume that the current through resistor 50Ω in the given circuit is zero, the value of R is

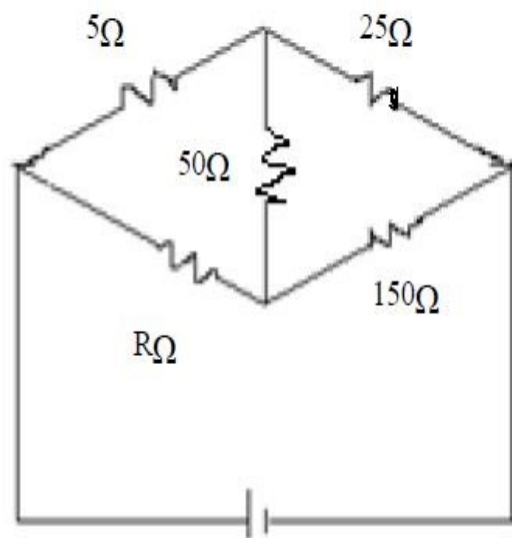

Options :

1. ✔ 30Ω

2. ✘ 40Ω

3. ✘ 50Ω

4. ✘ 100Ω

Question Number : 75 Question Id : 80089419720 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The force of attraction between the magnetic poles of strength m_1 and m_2 separated by a distance 'd' in free space is given by

Options :

1. ✘
$$F = \frac{\mu}{4\pi} \frac{m_1 m_2}{d^2}$$

2. ✔
$$F = \frac{\mu_0}{4\pi} \frac{m_1 m_2}{d^2}$$

3. ✘
$$F = \frac{\mu_0}{2\pi} \frac{m_1 m_2}{d^2}$$

4. ✘
$$F = \frac{\mu_0}{4\pi} \frac{d^2}{m_1 m_2}$$

Chemistry

Section Id :	800894386
Section Number :	3
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	25
Number of Questions to be attempted :	25
Section Marks :	25
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Sub-Section Number :	1
Sub-Section Id :	800894440

Question Shuffling Allowed :

Yes

Question Number : 76 Question Id : 80089419721 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

According to Paulis exclusion principle, two electrons in the same orbital contains

Options :

1. ✘ Vertical spins

2. ✘ Angular spins

3. ✘ Same spins

4. ✔ Opposite spins

Question Number : 77 Question Id : 80089419722 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

In the formation of nitrogen molecule, the number of electron pairs shared between the two nitrogen atoms is

Options :

1. ✘ Two

2. ✔ Three

3. ✘ One

4. ✘ Four

Question Number : 78 Question Id : 80089419723 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

In the redox reaction of hypo and Iodine, the oxidation number of sulphur atom changes from

Options :

1. ✓ +2 to +2.5

2. ✗ +2.5 to +2.0

3. ✗ +2.0 to +3.0

4. ✗ +1.0 to +2.0

Question Number : 79 Question Id : 80089419724 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

When the Phenol and water mixed together, the formed solution is called

Options :

1. ✗ Homogeneous

2. ✓ Heterogeneous

3. ✗ Colloidal

4. ✗ Azeotropic

Question Number : 80 Question Id : 80089419725 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

How many grams of anhydrous oxalic acid is required to prepare one liter of 0.1 N oxalic acid solution?

Options :

1. ✘ 45 grams

2. ✘ 9.0 grams

3. ✔ 4.5 grams

4. ✘ 0.9 grams

Question Number : 81 Question Id : 80089419726 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If the sulphate ion concentration in a solution of $\text{Al}_2(\text{SO}_4)_3$ is 0.25 M, the concentration of $\text{Al}_2(\text{SO}_4)_3$ in the solution is

Options :

1. ✘ 0.250 M

2. ✘ 0.0625 M

3. ✔ 0.0833 M

4. ✘ 0.125M

Question Number : 82 Question Id : 80089419727 Question Type : MCQ Option Shuffling : Yes
Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical
Correct Marks : 1 Wrong Marks : 0

Which of the following pair of species represent as conjugate Acid base?

Options :

1. ✘ HCl, H₂O
2. ✘ H₃PO₄, H₃O⁺
3. ✔ HSO₃⁻, SO₃²⁻
4. ✘ H₂CO₃, CO₂

Question Number : 83 Question Id : 80089419728 Question Type : MCQ Option Shuffling : Yes
Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical
Correct Marks : 1 Wrong Marks : 0

From the following, choose the correct [H⁺] of a NaOH solution in M, if its pOH is 11.3

Options :

1. ✔ 2×10^{-3}
2. ✘ 2.7×10^{-3}
3. ✘ 2.7×10^{-12}
4. ✘ 6.2×10^{-8}

Question Number : 84 Question Id : 80089419729 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Hydrochloric acid is a strong acid. This means that _____.

Options :

1. ✓ HCl dissociates completely in to $H^+(aq)$ and $Cl^-(aq)$ when it dissolves in water
2. ✗ HCl does not dissociate at all when it is dissolved in water
3. ✗ HCl produces a gaseous product when it is neutralized
4. ✗ HCl cannot be neutralized by a weak base

Question Number : 85 Question Id : 80089419730 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The impurities associated with mineral used in metallurgy are called

Options :

1. ✗ Flux
2. ✓ Gangue
3. ✗ Slag
4. ✗ Ore

Question Number : 86 Question Id : 80089419731 Question Type : MCQ Option Shuffling : Yes
Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

German silver is an alloy of

Options :

1. ✘ Ag, Cu, Zn
2. ✘ Ag, Cu, Au
3. ✔ Cu, Zn, Ni
4. ✘ Cu, Zn, Fe

Question Number : 87 Question Id : 80089419732 Question Type : MCQ Option Shuffling : Yes
Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The degree of dissociation of weak electrolytes is

Options :

1. ✘ 100 %
2. ✘ ≥ 30 %
3. ✘ ≤ 10 %
4. ✔ < 3 %

Question Number : 88 Question Id : 80089419733 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

With reference to Faraday's second law, the weights of different substances deposited by the passage of the same quantity of electricity, are proportional to their _____

Options :

1. ✓ Chemical equivalent weights
2. ✗ Current supply
3. ✗ Chemical equivalent density
4. ✗ Molecular Weights

Question Number : 89 Question Id : 80089419734 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

A zinc rod is placed in 0.1M solution of zinc sulphate at 25°C. Assuming that the salt is dissociated to the extent of 95% at this dilution. The potential of the electrode at this temperature is ($E_{\text{Zn}^{2+}/\text{Zn}}^{\circ} = -0.76 \text{ V}$ and $\log 0.095 = -1.0223$).

Options :

1. ✗ -0.76 V
2. ✗ $+0.76 \text{ V}$
3. ✓ -0.79 V
4. ✗ $+0.79 \text{ V}$

Question Number : 90 Question Id : 80089419735 Question Type : MCQ Option Shuffling : Yes
Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical
Correct Marks : 1 Wrong Marks : 0

Which of the following does not corrode when exposed to air?

Options :

1. ✘ Cu

2. ✔ Al

3. ✔ Ag

4. ✘ Fe

Note: For this question, ambiguity is found in question/answer. Candidate will get full marks for this question if any of the correct options are chosen.

Question Number : 91 Question Id : 80089419736 Question Type : MCQ Option Shuffling : Yes
Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical
Correct Marks : 1 Wrong Marks : 0

Which metals from the following can provide cathodic protection to Iron?

Options :

1. ✘ Zn and Cu

2. ✘ Al and Cu

3. ✘ Al and Ni

4. ✓ Al and Zn

Question Number : 92 Question Id : 80089419737 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The hardness of water is caused by

Options :

1. ✗ Undissolved salts of Ca^{+2} and Mg^{+2}

2. ✗ Undissolved salts of Cu^{+2} and Mg^{+2}

3. ✓ Dissolved salts of Ca^{+2} and Mg^{+2}

4. ✗ Undissolved CaCO_3

Question Number : 93 Question Id : 80089419738 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

A water sample contains 204 mg of CaSO_4 per Litre. Its hardness in terms of CaCO_3 equivalent is

Options :

1. ✓ 150 ppm

2. ✗ 136 ppm

3. ✗ 204 ppm

100 ppm

4. ✘

Question Number : 94 Question Id : 80089419739 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Hard water can block radiators due to the formation of?

Options :

1. ✔ insoluble calcium and magnesium salts

2. ✘ insoluble sodium salts

3. ✘ insoluble phosphate salts

4. ✘ insoluble potassium salts

Question Number : 95 Question Id : 80089419740 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Choose the incorrect statement from the following options.

Options :

The molecular weight of the polymer steadily rises throughout the reaction,

1. ✘ in condensation polymerisation

2. ✘ In addition polymerisation, growth of chain is at one active centre.

3. ✘ No by product will be formed in the addition polymerisation

The molecular weight of the polymer steadily increases throughout the reaction,

4. ✓ in addition polymerisation

Question Number : 96 Question Id : 80089419741 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which of the following is a thermoplastic?

Options :

1. ✓ Teflon
2. ✗ Natural rubber
3. ✗ Neoprene
4. ✗ Buna-S

Question Number : 97 Question Id : 80089419742 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which of the following a characteristic feature is of a good fuel?

Options :

1. ✗ High moisture content
2. ✗ Should undergo spontaneous combustion
3. ✗ Low calorific value

4. ✓ High calorific value

Question Number : 98 Question Id : 80089419743 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Producer gas is primarily a mixture of

Options :

1. ✓ CO + N₂

2. ✗ CO + H₂

3. ✗ CO + CH₄

4. ✗ N₂ + H₂

Question Number : 99 Question Id : 80089419744 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The measurement of dissolved oxygen used by microorganisms during the biochemical oxidation of organic matter in 5 days at 20°C is said to be

Options :

1. ✓ Biological Oxygen Demand

2. ✗ Chemical Oxygen Demand

3. ✗ Biological Dissolved Oxygen

Threshold Oxygen Demand

4. ✘

Question Number : 100 Question Id : 80089419745 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which of the following is a green house gas?

Options :

1. ✘ H₂

2. ✘ N₂

3. ✘ CO

4. ✔ CO₂

Electronics and Communication Engineering

Section Id :	800894387
Section Number :	4
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	100
Number of Questions to be attempted :	100
Section Marks :	100
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Sub-Section Number :	1

Sub-Section Id :

800894441

Question Shuffling Allowed :

Yes

Question Number : 101 Question Id : 80089419746 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

In a PN junction diode the Depletion region behaves as

Options :

1. ✘ Semiconductor

2. ✔ Insulator

3. ✘ Conductor

4. ✘ High resistance

Question Number : 102 Question Id : 80089419747 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which of the following circuit is used to add a dc voltage to its input signal?

Options :

1. ✘ Rectifier

2. ✘ Regulator

3. ✔ Clamper

4. ✘ Clipper

Question Number : 103 Question Id : 80089419748 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

JFET exhibits a high input impedance because

Options :

1. ✓ The input is reverse biased
2. ✗ It is made up of semiconductor material
3. ✗ It is made of impurity atoms
4. ✗ It has a channel

Question Number : 104 Question Id : 80089419749 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Match the following with reference to rectifiers:

- | | |
|---|-----------------------------------|
| (i) Ripple factor of Half wave rectifier | (a) $\frac{V_m}{\pi} - I_{dc}R_f$ |
| (ii) Ripple factor of Full wave rectifier | (b) 1.21 |
| (iii) PIV of full wave rectifier | (c) $2V_m$ |
| (iv) V_{dc} of Half wave rectifier | (d) 0.482 |

Options :

1. ✗ (i) – d , (ii) – b , (iii) – a , (iv) – c
2. ✗ (i) – c , (ii) – a , (iii) – d , (iv) – b

3. ✘ (i) – d, (ii) – a , (iii) – b , (iv) – c

4. ✔ (i) – b , (ii) – d, (iii) – c, (iv) – a

Question Number : 105 Question Id : 80089419750 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

In a rectifier, larger the value of shunt capacitor filter

Options :

1. ✘ Larger the peak to peak value of ripple voltage

2. ✘ Longer the time that current pulse flows through the diode

3. ✔ Larger the peak current in the rectifying diode

4. ✘ Smaller the DC voltage across the load

Question Number : 106 Question Id : 80089419751 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which one of the following is major drawback of Series Voltage Regulator compared to Shunt Voltage Regulator?

Options :

1. ✘ Regulating device is in series with the load

2. ✔ Additional circuitry is required for the short circuit protection

3. ✘ Easily fabricated on a single silicon chip
4. ✘ More complex than the discrete configuration

Question Number : 107 Question Id : 80089419752 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The conditions for a transistor to be in saturation are

Options :

1. ✘ $|I_B| \geq \frac{|I_C|}{h_{FE}}$, V_{CB} is positive for a npn transistor, emitter junction is forward bias
2. ✘ $|I_B| \leq \frac{|I_C|}{h_{FE}}$, V_{CB} is positive for a pnp transistor, emitter junction is reverse bias
3. ✔ $|I_B| \geq \frac{|I_C|}{h_{FE}}$, V_{CB} is positive for a pnp transistor, emitter junction is forward bias
4. ✘ $|I_B| \leq \frac{|I_C|}{h_{FE}}$, V_{CB} is positive for a npn transistor, emitter junction is reverse bias

Question Number : 108 Question Id : 80089419753 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

In an ideal differential amplifier, a large value of emitter resistor R_E is

Options :

1. ✘ Increases both differential & common mode gains

2. ✘ Increases the common mode gain only
3. ✘ Decreases the differential gain only
4. ✔ Decreases the common mode gain only

Question Number : 109 Question Id : 80089419754 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

In a differential amplifier, the differential voltage gain and the common mode voltage gain are 48 dB & 2 dB respectively, then its common mode rejection ratio is ____ dB

Options :

1. ✘ 25
2. ✘ 50
3. ✔ 46
4. ✘ 24

Question Number : 110 Question Id : 80089419755 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The condition of sustained oscillations in RC phase shift oscillator using BJT is

Options :

1. ✘ $h_{fe(\min)} \leq 4 \frac{R}{R_C} + 23 + 29 \frac{R}{R_C}$

2. ✘ $h_{fe(\min)} \geq 4 \frac{R_C}{R} + 23 + 29 \frac{R_C}{R}$

3. ✔ $h_{fe(\min)} \geq 4 \frac{R_C}{R} + 23 + 29 \frac{R}{R_C}$

4. ✘ $h_{fe(\min)} \leq 4 \frac{R}{R_C} + 23 + 29 \frac{R_C}{R}$

Question Number : 111 Question Id : 80089419756 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which of the following devices does not have a negative resistance characteristics ?

Options :

1. ✘ Tunnel Diode

2. ✘ UJT

3. ✔ FET

4. ✘ SCR

Question Number : 112 Question Id : 80089419757 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which of the following ideal characteristics of operational amplifier is correct?

(R_i = input resistance, R_o = output resistance, A_V = open circuit voltage gain, B = Band width)

Options :

1. ✘ $R_i = \infty, R_o = \infty, A_V = 0, B = 0$

2. ✘ $R_i = 0, R_o = \infty, A_v = \infty, B = 1$

3. ✔ $R_i = \infty, R_o = 0, A_v = -\infty, B = \infty$

4. ✘ $R_i = 0, R_o = \infty, A_v = 0, B = -\infty$

Question Number : 113 Question Id : 80089419758 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

In IC 555 oscillator circuit which of the pins are connected together to re-trigger itself for every cycle?

Options :

1. ✘ Pin 7 and 8

2. ✘ Pin 4 and 5

3. ✘ Pin 1 and 3

4. ✔ Pin 2 and 6

Question Number : 114 Question Id : 80089419759 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The function of low pass filter in phase-locked loop is

Options :

1. ✘ Improves low frequency noise

2. ✓ Removes high frequency noise

3. ✗ Tracks the voltage changes

4. ✗ Changes the input frequency

Question Number : 115 Question Id : 80089419760 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The voltage gain of a tuned amplifier is at resonant frequency.

Options :

1. ✗ Minimum

2. ✓ Maximum

3. ✗ Half-way between maximum and minimum

4. ✗ Zero

Question Number : 116 Question Id : 80089419761 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Kirchhoff's voltage law states that


Options :

1. ✓ Sum of voltages around a loop is equal to zero

2. ✘ Sum of voltages around a node is equal to zero
3. ✘ Sum of current entering a node is equal to zero
4. ✘ Sum of voltages entering a node is equal to zero

Question Number : 117 Question Id : 80089419762 Question Type : MCQ Option Shuffling : Yes
Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical
Correct Marks : 1 Wrong Marks : 0

For the circuit shown below the current flowing through 24Ω resistor is _____ A.

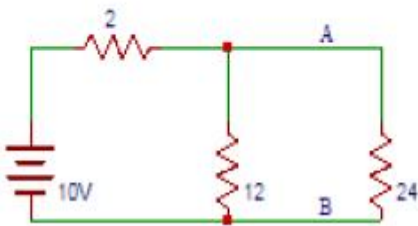

Options :

1. ✔ 0.33
2. ✘ 0.66
3. ✘ 0
4. ✘ 0.99

Question Number : 118 Question Id : 80089419763 Question Type : MCQ Option Shuffling : Yes
Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical
Correct Marks : 1 Wrong Marks : 0

The matrix formed by link branches of a tie set matrix is

Options :


1. ✘ Row matrix
2. ✘ Column matrix
3. ✘ Diagonal matrix
4. ✔ Identity matrix

Question Number : 119 Question Id : 80089419764 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The current i_3 in the circuit shown below is _____ A.

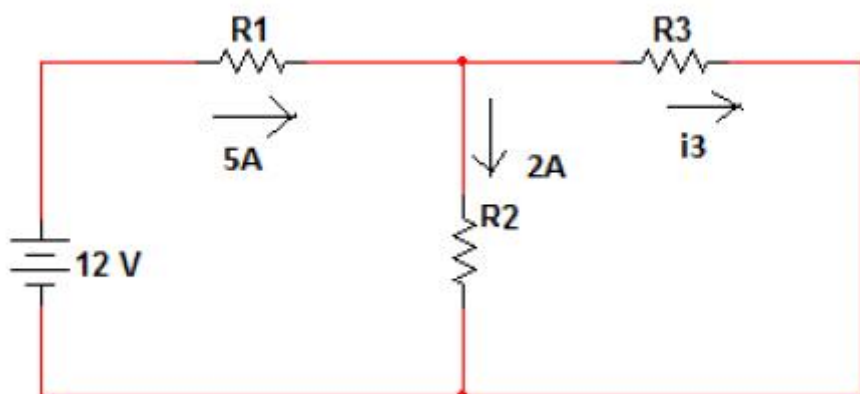

Options :

1. ✘ 2
2. ✘ 1
3. ✔ 3
4. ✘ 0.5

Question Number : 120 Question Id : 80089419765 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

At resonant frequency, the voltage across capacitor is _____ the voltage across inductor in LC circuit.

Options :

1. ✘ greater than
2. ✘ less than
3. ✘ greater than or equal to
4. ✔ equal to

Question Number : 121 Question Id : 80089419766 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

One of the following statement is false with respect to Reciprocity theorem:

Options :

1. ✘ The current must have a single source
2. ✘ Initial conditions are assumed to be absent in the circuit
3. ✘ Dependent sources are excluded even if they are linear
4. ✔

When the positions of source and response are interchanged, their directions should be opposite as in the original circuit

Question Number : 122 Question Id : 80089419767 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Superposition Theorem is applicable to

Options :

1. ✘ Voltage Sources only
2. ✘ Current Sources only
3. ✘ Both Voltage and Current Sources
4. ✔ Voltage and Current and power Sources

Question Number : 123 Question Id : 80089419768 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

If the Q of the coil is increased, the power factor of it will

Options :

1. ✘ increase
2. ✔ decrease
3. ✘ remains constant

4. ✘ become zero

Question Number : 124 Question Id : 80089419769 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The distributed capacitance and inductance parameters of loss-less transmission line are $20\mu\text{F/m}$ and $80\mu\text{H/m}$.

The values of characteristic impedance and speed of propagation are

Options :

1. ✘ $25\ \Omega$, $2\ \text{Km/sec}$

2. ✔ $2\ \Omega$, $25\ \text{Km/sec}$

3. ✘ $4\ \Omega$, $16\ \text{Km/sec}$

4. ✘ $1.33\ \Omega$, $4\ \text{Km/sec}$

Question Number : 125 Question Id : 80089419770 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The measure of mismatch between the load and the transmission line is known as

Options :

1. ✔ Reflection coefficient

2. ✘ 1/Gain

3. ✘ Standing wave ratio

4. ✘ Directivity

Question Number : 126 Question Id : 80089419771 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If the cathode of SCR is made positive with respect to the anode and gate current is not applied, then

Options :

1. ✘ All the junctions are reverse biased

2. ✘ All the junctions are forward biased

3. ✔ Only the middle junction is forward biased

4. ✘ Only the middle junction is reverse biased

Question Number : 127 Question Id : 80089419772 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

An SCR is rated at 800V peak inverse voltage. Find the voltage for which the device can be operated if the

voltage safety factor is 2?

Options :

1. ✘ 400 V

2. ✔ 282.8 V

3. ✘ 250 V

4. ✘ 2.5 mV

Question Number : 128 Question Id : 80089419773 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

In two phase servomotor, the voltage applied to control phase is ----- with the reference phase.

Options :

1. ✘ Same phase

2. ✘ 45° phase difference

3. ✔ 90° out of phase

4. ✘ 180° in phase

Question Number : 129 Question Id : 80089419774 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The sensitivity of an LVDT that produces an RMS output voltage of 2.6 V for a displacement of $0.4 \mu\text{m}$ is _____

Options :

1. ✘ 7.5 V/ m

2. ✓ 6.5 V/ μm

3. ✗ 8.5 V/ m

4. ✗ 5.6 V/ μm

Question Number : 130 Question Id : 80089419775 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If the gauge factor of the material of a strain gauge is such that the resistance changes from 1000Ω to 1009Ω

when subjected to a strain 0.002, calculate the value of the gauge factor?

Options :

1. ✗ 0.002

2. ✗ 0.009

3. ✗ 2.22

4. ✓ 4.50

Question Number : 131 Question Id : 80089419776 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Induction heating takes place in

Options :

1. ✗ conducting but non-magnetic materials

2. ✓ conducting materials which may be either magnetic or non-magnetic materials
3. ✗ insulating materials
4. ✗ conducting and magnetic materials

Question Number : 132 Question Id : 80089419777 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

___ heating method has a leading power factor

Options :

1. ✗ Arc
2. ✗ Resistance
3. ✓ Dielectric
4. ✗ Inductive

Question Number : 133 Question Id : 80089419778 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The capability of conventional relay systems for complex operations is _____ that of the PLCs

Options :

1. ✗ better than

2. ✓ poorer than

3. ✗ unpredictable than


4. ✗ as good as

Question Number : 134 Question Id : 80089419779 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The following ladder symbol diagram represents:

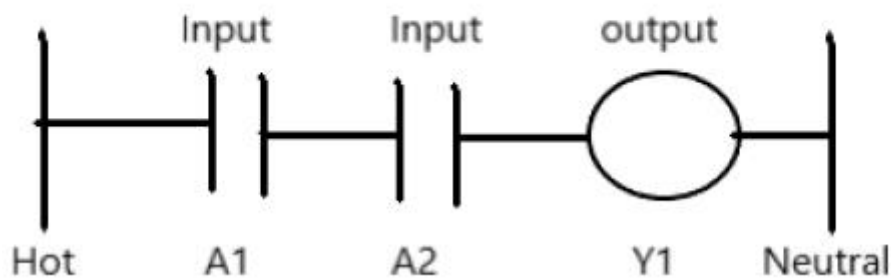

Options :

1. ✓ And gate

2. ✗ Not gate

3. ✗ OR gate

4. ✗ NOR gate

Question Number : 135 Question Id : 80089419780 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

A closed loop system has negative gain margin, then the system is

Options :

1. ✓ Unstable
2. ✗ Stable
3. ✗ Marginally stable
4. ✗ Conditionally stable

Question Number : 136 Question Id : 80089419781 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

An Amplitude Modulated Signal has V_{\max} of 5.9 and V_{\min} of 1.2. The Modulation Index is

Options :

1. ✗ 0.64
2. ✓ 0.662
3. ✗ 0.712
4. ✗ 0.46

Question Number : 137 Question Id : 80089419782 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which of the following is an indirect method of generating FM signal?

Options :

1. ✘ Varactor diode modulation
2. ✔ Armstrong modulation
3. ✘ Reactance BJT Modulator
4. ✘ Reactive FM Modulator

Question Number : 138 Question Id : 80089419783 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

A broadcast radio transmitter radiates 20 KW, when the modulation Percentage is 60. The carrier power will be

Options :

1. ✘ 1.2 KW
2. ✘ 1.45 KW
3. ✔ 16.94 KW
4. ✘ 20 KW

Question Number : 139 Question Id : 80089419784 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

De-emphasis is related to

Options :

1. ✘ PM Receivers
2. ✘ Automatic Voltage Control
3. ✘ AM Receivers
4. ✔ FM Receivers

Question Number : 140 Question Id : 80089419785 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Propagation by means of Space wave occurs in

Options :

1. ✘ HF range
2. ✘ LF range
3. ✘ VLF range
4. ✔ UHF range

Question Number : 141 Question Id : 80089419786 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

In ionospheric region when N is the maximum electron density in per cubic metre, then Critical Frequency f_c is

Options :

1. ✘ $9N$

2. ✘ $9N^3/2$

3. ✔ $9\sqrt{N}$

4. ✘ $9/\sqrt{N}$

Question Number : 142 Question Id : 80089419787 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The expression for bandwidth BW of a PCM system, where v is the number of bits per sample and f_m is the modulating frequency, is given by

Options :

1. ✘ $BW \leq vf_m$

2. ✔ $BW \geq vf_m$

3. ✘ $BW \geq 2vf_m$

4. ✘ $BW \geq 1/2vf_m$

Question Number : 143 Question Id : 80089419788 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

In delta modulation, the slope overload distortion can be reduced by

Options :

1. ✘ Decreasing the Step size
2. ✘ Decreasing the Granular noise
3. ✘ Decreasing the Sampling rate
4. ✔ Increasing the Step size

Question Number : 144 Question Id : 80089419789 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Amplitude Shift keying is also called

Options :

1. ✔ On -Off Keying
2. ✘ Amplitude keying
3. ✘ Amplitude modulation
4. ✘ Phase Shift Keying

Question Number : 145 Question Id : 80089419790 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

When calculating the maximum number of users, a limiting factor in FDM is:

Options :

1. ✘ type of media used
2. ✘ length of the channel
3. ✔ bandwidth of each signal
4. ✘ voltage of each signal

Question Number : 146 Question Id : 80089419791 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The horizontal radiation pattern of a dipole antenna is

Options :

1. ✘ Narrow beam
2. ✔ Figure of Eight
3. ✘ Clover leaf
4. ✘ Circle

Question Number : 147 Question Id : 80089419792 Question Type : MCQ Option Shuffling : Yes
Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical
Correct Marks : 1 Wrong Marks : 0

The gain of an isotropic antenna is _____ dB

Options :

1. ✘ 1

2. ✔ 0

3. ✘ 10

4. ✘ 100

Question Number : 148 Question Id : 80089419793 Question Type : MCQ Option Shuffling : Yes
Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical
Correct Marks : 1 Wrong Marks : 0

The relationship between antenna gain G and effective area A_e is

Options :

1. ✔ $G = \frac{4\pi}{\lambda^2} A_e$ (λ is wave length)

2. ✘ $G = cA_e$ (c is free space light velocity)

3. ✘ $G = \eta A_e$ (η is efficiency)

4. ✘ $G = \frac{4\pi}{f^2} A_e$ (f is carrier frequency)

Question Number : 149 Question Id : 80089419794 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

An air filled rectangular waveguide of inside dimensions $5\text{cm} \times 2.5\text{cm}$ operates at the dominant mode. Find guide wavelength at $f = 5\text{GHz}$?

Options :

1. ✓ 0.075 m

2. ✗ 0.06 m

3. ✗ 0.625 m

4. ✗ 0.125 m

Question Number : 150 Question Id : 80089419795 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

In a magnetron, oscillations are produced due to the bunching of electrons under

Options :

1. ✗ Only radial electric field without any magnetic field

2. ✗ Axial electric field and radial magnetic field

3. ✓ Radial electric field and axial magnetic field

4. ✗ Axial electric field without the need of magnetic field

Question Number : 151 Question Id : 80089419796 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The principle of operation of klystron is

Options :

1. ✘ Frequency modulation
2. ✘ Phase modulation
3. ✔ Velocity modulation
4. ✘ Density modulation

Question Number : 152 Question Id : 80089419797 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The range beyond which targets appear as second-time-around echoes is called

Options :

1. ✘ Maximum ambiguous range
2. ✔ Maximum unambiguous range
3. ✘ Pulse repetition frequency
4. ✘

Near field region

Question Number : 153 Question Id : 80089419798 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

A delay-line canceller in MTI radar introduces a time delay of

Options :

1. ✘ One fourth of echo time
2. ✘ Half of the backward time
3. ✘ Twice the forward time
4. ✔ Equal to pulse repetition time

Question Number : 154 Question Id : 80089419799 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

A circular orbit around the equator with a 24-Hr period is called ____ orbit.

Options :

1. ✘ Polar
2. ✘ Elliptical
3. ✘ Transfer

4. ✓ Geostationary

Question Number : 155 Question Id : 80089419800 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The following is one of the uplink/downlink frequencies for satellite communication:

Options :

1. ✗ 4/6 GHz

2. ✓ 6/4 GHz

3. ✗ 3/2 GHz

4. ✗ 13/16 GHz

Question Number : 156 Question Id : 80089419801 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

For the binary number 110011100 the equivalent octal number is

Options :

1. ✗ 559

2. ✗ 654

3. ✗ 364

4. ✓ 634

Question Number : 157 Question Id : 80089419802 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

For the identity $AB + A'C + BC = AB + A'C$ the dual form is

Options :

1. ✗ $(A+B)(A'+C)(B+C) = (A'+B)(A+C)$

2. ✗ $(A'+B)(A'+C)(B+C) = A'+B(A+C)$

3. ✓ $(A+B)(A'+C)(B+C) = (A+B)(A'+C)$

4. ✗ $A'B + A'C + BC = AB + A'C$

Question Number : 158 Question Id : 80089419803 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which code is used for labeling the cells of K-map?

Options :

1. ✗ Binary

2. ✗ BCD

3. ✓ Gray

4. ✘ ASCII

Question Number : 159 Question Id : 80089419804 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

A full-adder can be implemented with half-adders and OR gates. A 4-bit parallel full adder without any initial carry requires

Options :

1. ✘ 8 Half-adders, 4-OR gates

2. ✘ 8 Half-adders, 3-OR gates

3. ✘ 7 Half-adders, 4-OR gates

4. ✔ 7 Half-adders, 3-OR gates

Question Number : 160 Question Id : 80089419805 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

If the number of input lines 'n' is equal to 2^m , then it requires _____ select lines.

Options :

1. ✔ m

2. ✘ 2^m

3. ✘

$$2^{n/m}$$

4. ✘ 2^n

Question Number : 161 Question Id : 80089419806 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Decoder with enable input can be used as

Options :

1. ✔ Demultiplexer

2. ✘ XOR

3. ✘ Encoder

4. ✘ Multiplexer

Question Number : 162 Question Id : 80089419807 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The number of unused states in a 4-bit Johnson counter is

Options :

1. ✘ 2

2. ✘ 4

3. ✔ 8

4. ✘ 12

Question Number : 163 Question Id : 80089419808 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

For a ring counter, the number of output states are always equal to number of _____

Options :

1. ✘ input states

2. ✘ clock pulses

3. ✘ double the clock pulses

4. ✔ flip flops

Question Number : 164 Question Id : 80089419809 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

An 'n' bit D/A converter, gives a maximum output of ' V_{\max} .' The resolution is

Options :

1. ✔ $V_{\max} / 2^n - 1$

2. ✘ $V_{\max} / 2^n$

3. ✘ $V_{\max} \times 2^n$

4. ✘ $V_{\max} - 1/2^n$

Question Number : 165 Question Id : 80089419810 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Minimum Number of Comparators required to build an 8 bit Flash ADC

Options :

1. ✘ 4

2. ✔ 255

3. ✘ 8

4. ✘ 256

Question Number : 166 Question Id : 80089419811 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

In 8051 microcontroller after reset, Stack Pointer(SP) register is initialized to _____ address.

Options :

1. ✘ 8H

2. ✘ 9H

3. ✓ 7H

4. ✘ 6H

Question Number : 167 Question Id : 80089419812 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

In 8085 the data is stored in the stack on

Options :

1. ✘ first in first out basis

2. ✓ last in first out basis

3. ✘ first in last out basis

4. ✘ last in last out basis

Question Number : 168 Question Id : 80089419813 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

MOV A,@ R1 will indicate

Options :

1. ✘ Copy the contents of R1 to Accumulator

2. ✘ Copy the contents of accumulator to R1

3. ✓ Copy the contents of memory whose address is in R1 to the accumulator
4. ✗ Copy the contents of the accumulator to memory whose address is in R1

Question Number : 169 Question Id : 80089419814 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

8051 Microcontroller has a RAM of

Options :

1. ✓ 128 bytes
2. ✗ 256 bytes
3. ✗ 64 bytes
4. ✗ 512 bytes

Question Number : 170 Question Id : 80089419815 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The number of bit addressable memory present in 8051 microcontroller is ___ bytes.

Options :

1. ✗ 8
2. ✗ 32

3. ✘ 128

4. ✔ 16

Question Number : 171 Question Id : 80089419816 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The operating modes of 8255 A are called

Options :

1. ✘ mode 0 and mode 1

2. ✔ mode 0, mode 1 and mode 2

3. ✘ mode 0 and mode 2

4. ✘ mode 1 and mode 2

Question Number : 172 Question Id : 80089419817 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

When 8051 Microcontroller is interfaced to LCD, which command of an LCD is used to shift the entire display to the right?

Options :

1. ✘ 0x05

2. ✘ 0x18

3. ✓ 0x1C

4. ✗ 0x07

Question Number : 173 Question Id : 80089419818 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

The steps followed in programming the ADC0808 IC are

Options :

1. ✗ select the analog channel, start the conversion, monitor the conversion, display the digital results

select the analog channel, activate the ALE signal (H to L pulse), start the conversion, monitor the conversion,

2. ✗ read the digital results

3. ✗ select the channel, start the conversion, end the conversion

select the analog channel, activate the ALE signal (L to H pulse), start the conversion, monitor the conversion,

read the digital results.

4. ✓

Question Number : 174 Question Id : 80089419819 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which bit of TMOD will exactly configure timer / counter as a timer or counter?

- i) TMOD.6 of C/T for timer 1
- ii) TMOD.6 of C/T for timer 0
- iii) TMOD.2 of C/T for timer 0
- iv) TMOD.2 of C/T for timer 1

Options :

- 1. ✘ i, ii
- 2. ✔ i, iii
- 3. ✘ ii, iv
- 4. ✘ iii, iv

Question Number : 175 Question Id : 80089419820 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Which of the following encoding method is specified in the EIA-232 standard?

Options :

- 1. ✘ NRZ-I
- 2. ✔ NRZ-L
- 3. ✘ Manchester
- 4. ✘ Differential Manchester

Question Number : 176 Question Id : 80089419821 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The number of scan lines / field in the 625-B monochrome TV system is

Options :

1. ✓ 312.5

2. ✗ 625

3. ✗ 311.5

4. ✗ 300

Question Number : 177 Question Id : 80089419822 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The capability of the system to resolve maximum number of picture elements along the scanning line determines

Options :

1. ✗ Vertical Resolution

2. ✓ Horizontal Resolution

3. ✗ Scanning Period

4. ✗ Kell Factor

Question Number : 178 Question Id : 80089419823 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

VSB modulation is preferred in TV because

Options :

1. ✓ It reduces the bandwidth requirement to half
2. ✗ It results in better reception
3. ✗ It results in better transmission
4. ✗ It avoids phase distortion at low frequencies

Question Number : 179 Question Id : 80089419824 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The Horizontal and Vertical sync information extracted from sync pulse train respectively by passing through

Options :

1. ✗ Low pass filter and High pass filter
2. ✗ Low pass filter and Low pass filter
3. ✓ High pass filter and Low pass filter
4. ✗

High pass filter and High pass filter

Question Number : 180 Question Id : 80089419825 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

In a NTSC color TV system , the phase difference between I and Q signals is

Options :

1. ✓ 90°

2. ✗ 0°

3. ✗ 180°

4. ✗ 270°

Question Number : 181 Question Id : 80089419826 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Match the following:

(i) Contrast

(a) amount of light intensity

(ii) Luminance

(b) difference in light intensity

(iii) Hue

(c) spectral purity of color

(iv) Saturation

(d) predominant spectral color

Options :

1. ✗ (i) – d , (ii) – c , (iii) – a , (iv) – b

2. ✘ (i) – a , (ii) – c , (iii) – b , (iv) – d

3. ✔ (i) – b , (ii) – a , (iii) – d , (iv) – c

4. ✘ (i) – c , (ii) – b , (iii) – d , (iv) – a

Question Number : 182 Question Id : 80089419827 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

In the NTSC system, the two colour difference signals are

Options :

1. ✔ Not Transmitted together

2. ✘ Transmitted together

3. ✘ Transmitted in quadrature

4. ✘ Transmitted in anti-phase

Question Number : 183 Question Id : 80089419828 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The color burst is placed at the back porch of each horizontal blanking pulse,

Options :

1. ✘ To extract horizontal sync pulse at the receiver

2. ✘ To extract vertical sync pulse at the receiver
3. ✔ Used to lock the subcarrier oscillator of receiver with that at the transmitting end
4. ✘ Used to separate the sound signal at the receiver

Question Number : 184 Question Id : 80089419829 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Scanning lines & frequency in HDTV are

Options :

1. ✔ 1125,50Hz
2. ✘ 625,50Hz
3. ✘ 819,60Hz
4. ✘ 625, 60Hz

Question Number : 185 Question Id : 80089419830 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

In a color TV receiver, Y I Q refers to

Options :

1. ✘ Composite video signal, in-phase video component, quadrature video color component

2. ✓ Luminance signal, in-phase color component, quadrature phase color component
3. ✗ Composite color signal, in-phase color component, quadrature phase color component
4. ✗ A method of demodulating stereo sound

Question Number : 186 Question Id : 80089419831 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Which of the following offers wider bandwidth?

Options :

1. ✗ Un shielded twisted pair
2. ✗ Shielded twisted pair
3. ✗ Coaxial cable
4. ✓ Optical fibre

Question Number : 187 Question Id : 80089419832 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

If 'B' is the Channel Bandwidth, 'S' is the signal power and 'N' is the total noise with in the Channel Bandwidth,

then the Channel Capacity of a White Gaussian Band limited channel is

Options :

1. ✓ $B \log_2 (1 + S/N)$ bits /sec
2. ✗ $B (S/N)$ bits/sec
3. ✗ $B \log_2 (1 + N/S)$ bits /sec
4. ✗ $B \log_2 (S/N)$ bits /sec

Question Number : 188 Question Id : 80089419833 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

According to Shannon Hartley theorem,

Options :

1. ✗ the channel capacity becomes infinite with infinite bandwidth
2. ✗ the channel capacity become zero with infinite bandwidth
3. ✓ has a tradeoff between bandwidth and Signal to noise ratio
4. ✗ the bandwidth is proportional to Signal to noise ratio

Question Number : 189 Question Id : 80089419834 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

State True or False for the following statements about single-mode and multi-mode fibers.

- i) Multi-mode fiber can have either a step-index or a graded-index profile.
- ii) Single-mode fiber is a high-quality fiber for wideband long haul transmission.
- iii) The amount of dispersion introduced in single-mode fiber is greater than that introduced in the multi-mode fibers.

Options :

- 1. ✘ i-True, ii-False, iii-True
- 2. ✘ i-True, ii-True, iii-True
- 3. ✘ i-False, ii-True, iii-False
- 4. ✔ i-True, ii-True, iii-False

Question Number : 190 Question Id : 80089419835 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Datagram network is also called

Options :

- 1. ✘ Circuit Switched Network
- 2. ✘ Virtual circuit switched network
- 3. ✘ Connection oriented Network
- 4. ✔ Connection less Network

Question Number : 191 Question Id : 80089419836 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which of the following Layer is closest to the transmission medium?

Options :

1. ✓ Physical Layer
2. ✗ Network layer
3. ✗ Transport layer
4. ✗ Application layer

Question Number : 192 Question Id : 80089419837 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

_____ switched network supports pipelining effect

Options :

1. ✗ Circuit
2. ✗ Virtual circuit
3. ✗ Message
4. ✓ Packet

Question Number : 193 Question Id : 80089419838 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Which of the following is class B network address?

Options :

1. ✓ 128.4.5.6

2. ✗ 127.4.5.0

3. ✗ 127.0.0.0

4. ✗ 127.8.0.0

Question Number : 194 Question Id : 80089419839 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

_____ specifies a set of media access control (MAC) and physical layer specifications for implementing

WLANs?

Options :

1. ✗ IEEE 802.16

2. ✗ IEEE 802.3

3. ✓ IEEE 802.11

4. ✗ IEEE 802.15

Question Number : 195 Question Id : 80089419840 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Length of the Destination address in IPv4 is

Options :

1. ✘ 8 bytes
2. ✘ 32 bytes
3. ✔ 4 bytes
4. ✘ 16 bytes

Question Number : 196 Question Id : 80089419841 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

Identify the function of the Fire Wall.

Options :

1. ✔ Packet Filtering
2. ✘ Packet Expansion
3. ✘ Packet Compression
4. ✘ Packet Description

Question Number : 197 Question Id : 80089419842 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

HTTP client requests by establishing a _____ connection to a particular port on the server.

Options :

1. ✘ User datagram protocol
2. ✔ Transmission control protocol
3. ✘ Border gateway protocol
4. ✘ Domain host control protocol

Question Number : 198 Question Id : 80089419843 Question Type : MCQ Option Shuffling : Yes Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical Correct Marks : 1 Wrong Marks : 0

The values GET, POST, HEAD etc are specified in _____ of HTTP message

Options :

1. ✔ Request line
2. ✘ Header line
3. ✘ Status line

4. ✘ Entity body

Question Number : 199 Question Id : 80089419844 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Number of Parallel TCP Connections used in FTP is

Options :

1. ✘ 1

2. ✔ 2

3. ✘ 3

4. ✘ 4

Question Number : 200 Question Id : 80089419845 Question Type : MCQ Option Shuffling : Yes

Display Question Number : Yes Is Question Mandatory : No Option Orientation : Vertical

Correct Marks : 1 Wrong Marks : 0

Output of Encryption process is called

Options :

1. ✘ Plain text

2. ✘ Message

3. ✔ Cipher text

4. ✖ Key