Andhra Pradesh State Council of Higher Education

Notations:

1.Options shown in green color and with ✓ icon are correct.

2.Options shown in red color and with * icon are incorrect.

Question Paper Name :	Instrumentation Engineering 29th Sep 2021 Shift1
Duration :	120
Total Marks :	120
Display Marks:	No
Share Answer Key With Delivery Engine :	Yes
Calculator :	None
Magnifying Glass Required?:	No
Ruler Required?:	No
Eraser Required?:	No
Scratch Pad Required? :	No
Rough Sketch/Notepad Required?:	No
Protractor Required?:	No
Show Watermark on Console? :	Yes
Highlighter:	No
Auto Save on Console? (SA type of questions will be always auto saved):	Yes
Is this Group for Examiner? :	No

Instrumentation Engineering

Section Id: 8737182

Section Number:

Mandatory or Optional: Mandatory

Number of Questions: 120

Section Marks: 120

Enable Mark as Answered Mark for Review and


Yes

Clear Response:

Question Number: 1 Question Id: 873718121 Display Question Number: Yes Is Question


Mandatory: No

Find voltage VJ from the below network?

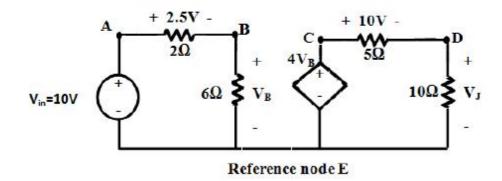

Mandatory: No

Which source is delivering and which source is absorbing power from the below figure?




Options:

- 10 volts source absorbing 20W, 2A source delivering -20W
- 2 × 10 volts source absorbing -20W, 2A source delivering 20W
- 3. * 10 volts source absorbing -20W, 2A source delivering -20W
- 4 ✓ 10 volts source absorbing 20W, 2A source delivering 20W

Question Number : 3 Question Id : 873718123 Display Question Number : Yes Is Question Mandatory : No

Find the Voltage V₂ from the below network?

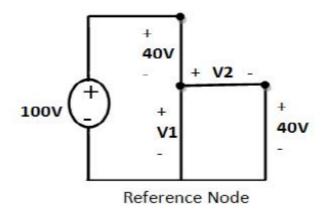


Options:

1. × -20V

Question Number : 4 Question Id : 873718124 Display Question Number : Yes Is Question Mandatory : No

Find Vx, Vo from the below network?

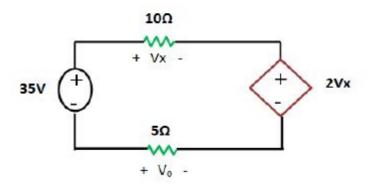


Options:

Question Number : 5 Question Id : 873718125 Display Question Number : Yes Is Question

Mandatory : No

Find i₁, i₂ and i₃ from the below network?

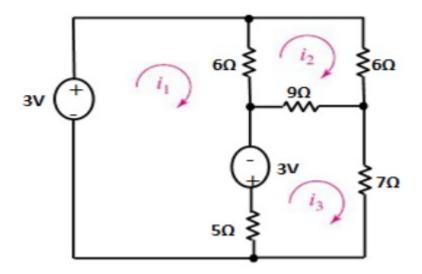

Options:

$$i_1 = 0.989 \text{ A}, i_2 = 0.15 \text{ A}, i_3 = 0.15 \text{ A}$$


2. *
$$i_1 = -0.989 \text{ A}, i_2 = 0.15 \text{ A}, i_3 = 0.15 \text{ A}$$

$$i_1 = 0.989 \text{ A}, i_2 = -0.15 \text{ A}, i_3 = 0.15 \text{ A}$$

$$i_1 = 0.989 \text{ A}, i_2 = 0.15 \text{ A}, i_3 = -0.15 \text{ A}$$

Question Number : 6 Question Id : 873718126 Display Question Number : Yes Is Question Mandatory : No

Find i1, i2 and i3 from the given network?

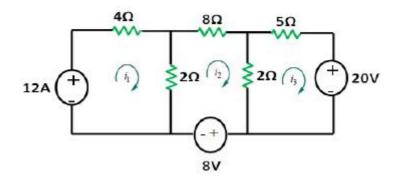

$$i_1 = -1.7A, 0.9A, 3.11A$$


$$i_1 = -1.7A, -0.9A, 3.11A$$

$$i_1 = -1.7A, 0.9A, -3.11A$$

$$4.$$
 \checkmark $i_1 = 1.7A, -0.9A, -3.11A$

Question Number : 7 Question Id : 873718127 Display Question Number : Yes Is Question Mandatory : No

Find current I in the given network

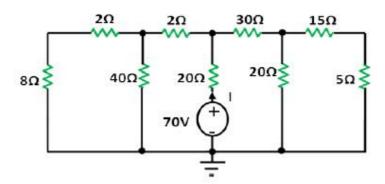

Options:


$$1. \checkmark I = 2.5A$$

$$_{3.} * I = -2.9A$$

$$_{4.} * I = -2.5A$$

Question Number : 8 Question Id : 873718128 Display Question Number : Yes Is Question Mandatory : No

Find voltage across the current source

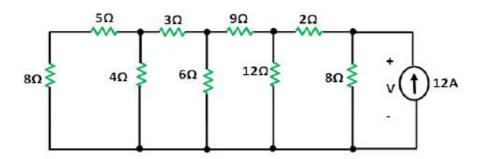


Options:

- 1. * -48 V
- 2 × -47 V
- 3. * -49 V
- 4. 🗸 48 V

Question Number : 9 Question Id : 873718129 Display Question Number : Yes Is Question Mandatory : No


Find the voltage across the 4 ohm and 2 ohm resistors respectively

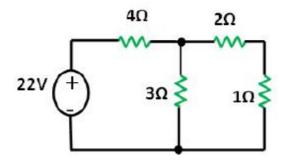

- 1. * -16V,-4V
- 2. ***** -16V,4V

Question Number : 10 Question Id : 873718130 Display Question Number : Yes Is Question Mandatory : No

Find the current through the 10k ohm, 5k ohm in the given network

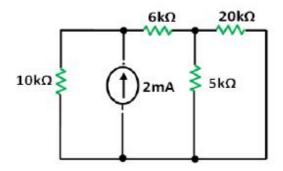

Options:

Question Number : 11 Question Id : 873718131 Display Question Number : Yes Is Question

Mandatory: No

A capacitive micropone is the application of

Options:

1. * Hygrometer

2. Capacitive moisture transducer Capacitive displacement transducer 4. * Capacitive strain transducer Question Number: 12 Question Id: 873718132 Display Question Number: Yes Is Question Mandatory: No Identify the active transducer in the following **Options:** 1. Thermocouple 2. * Thermistor 3. * Strain Guage 4. * LVDT Question Number: 13 Question Id: 873718133 Display Question Number: Yes Is Question Mandatory: No The relation between sensitivity and scale factor of a transducer is given by **Options:** 1. Scale factor is double of sensitivity factor 2. Scale factor is inverse of sensitivity factor

3. * Sensitivity is inverse of scale factor

4. * Sensitivity is equal to scale factor

Question Number : 14 Question Id : 873718134 Display Question Number : Yes Is Question Mandatory : No

A metal with temperature coefficient of resistance has a value 200, its initial resistance is given by 40Ω . For an increase in 300c to 350c what will be the final resistance value?

Options:

Question Number : 15 Question Id : 873718135 Display Question Number : Yes Is Question Mandatory : No

Self-inductance of an inductor is given by

$$L = N/S$$

$$L = N2/S$$

4. 🗱	L = N2
------	--------

Question Number : 16 Question Id : 873718136 Display Question Number : Yes Is Question Mandatory : No

In kitchen applications a piezoelectric crystal is used for

Options:

- 1. Skimming milk
- Lighting a gas stove
- 3. * Rending
- 4. Mixing


Question Number : 17 Question Id : 873718137 Display Question Number : Yes Is Question Mandatory : No

Piezoelectric transducer consists of

- Copper rod
- 2. * Aluminum wire
- 3. * Gold crystal
- 4. Quartz crystal

Question Number: 18 Question Id: 873718138 Display Question Number: Yes Is Question Mandatory: No A strain gauge is a passive transducer and is employed for converting **Options:** Mechanical displacement into a change of resistance 2 * Pressure into a change of resistance Force into a displacement 4. * Pressure into displacement Question Number: 19 Question Id: 873718139 Display Question Number: Yes Is Question Mandatory: No Certain type of materials generates an electrostatic charge or voltage when mechanical force is applied across them. Such materials are called **Options:** Piezo-electric 2. * Photo-electric 3. * Thermo-electric 4. * Photo-resistive

Question Number : 20 Question Id : 873718140 Display Question Number : Yes Is Question Mandatory : No

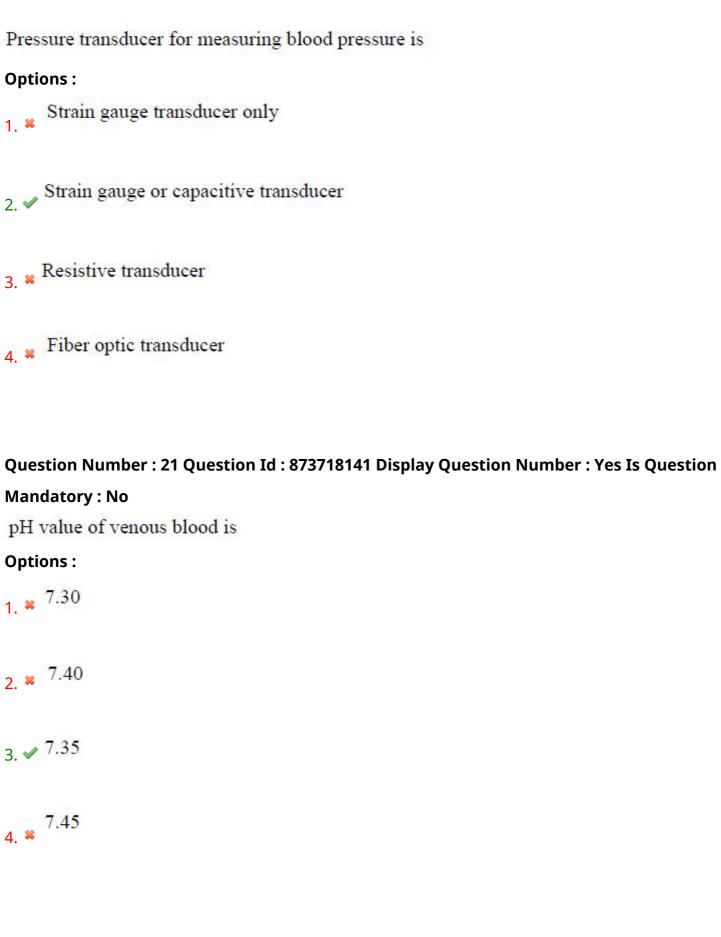

Question Number : 22 Question Id : 873718142 Display Question Number : Yes Is Question Mandatory : No

Strain gauge, LVDT and thermocouple are examples of

1. * Active transducers 2 * Passive transducers 3. Analog transducers 4 * Primary transducers Question Number: 23 Question Id: 873718143 Display Question Number: Yes Is Question Mandatory: No An inverse transducer is a device which converts **Options:** 1. An electrical quantity into a non electrical quantity 2. * Electrical quantity into mechanical quantity 3 * Electrical energy into thermal energy 4 ★ Electrical energy into light energy Question Number: 24 Question Id: 873718144 Display Question Number: Yes Is Question Mandatory: No Relative humidity is: **Options:** The moisture present in a body of air expressed as a percentage of saturation at the 1 wexisting temperature 7 * The moisture in a body of air, in grams per cubic meter

The temperature at which moisture will condense from a body of air

The ratio of actual moisture in a volume of air to the moisture that would exist at

4. * optimum comfort in a similar volume

Question Number : 25 Question Id : 873718145 Display Question Number : Yes Is Question Mandatory : No

When a wet and dry bulb Psychrometer is read to determine relative humidity:

Options:

The dry bulb will read lower than the wet bulb

2. * The two thermometers may read the same

The wet bulb will read lower than the dry bulb

A formula may be employed to relate the wet bulb reading to relative humidity

Question Number : 26 Question Id : 873718146 Display Question Number : Yes Is Question Mandatory : No

When the diode is shorted for both forward and reverse biased condition, meter reads

Options:

1. ***** 0.2 V

2. × 0.5 V

3 🗸 0 V

.7 V

Question Number : 27 Question Id : 873718147 Display Question Number : Yes Is Question

Mandatory: No

If the biasing voltage is 10 V and R = 1.0 Kohm, then forward voltage for practical diode model will be

Options:

- 1. * 5 V
- 2. 🗸 9.3 V
- 3. **×** 10 V
- 4. × 10.7 V

Question Number : 28 Question Id : 873718148 Display Question Number : Yes Is Question Mandatory : No

During diffusion, decrease in energy level of conduction band in n region is loss of _____

- Lower energy electrons
- 2. Higher energy electrons
- 3. * 1st Shell electrons
- 4. * 2nd Shell electrons


Question Number : 29 Question Id : 873718149 Display Question Number : Yes Is Question
Mandatory : No
A small voltage drop occurs across pn region due to internal resistance of material, this
small resistance is called
Options:
1. * Static Resistance
2. ✓ Dynamic Resistance
3. * Base Resistance
4. * Drain Resistance
Question Number : 30 Question Id : 873718150 Display Question Number : Yes Is Question
Mandatory : No
Typical open circuit voltage for both forward and reverse biased condition is approximately
Options:
1. * 0.6 V
2. * 0.7 V
3. ✓ 2.6 V
4. * 1.7 V
Question Number : 31 Question Id : 873718151 Display Question Number : Yes Is Question
Mandatory: No

RC coupling is used for _____ amplification

1. ✓ ^{Voltage}
2. * Current
3. * Power
4. * Resistance
Question Number: 32 Question Id: 873718152 Display Question Number: Yes Is Question Mandatory: No When a multistage amplifier is to amplify d.c. signal, then one must use coupling.
Options:
1. * RC
Transformer 2. **
3. ✓ Direct
4. * Indirect
Question Number : 33 Question Id : 873718153 Display Question Number : Yes Is Question
Mandatory : No
If a three-stage amplifier has individual stage gains of 10 db, 5 db and 12 db, then total
gain in db is
Options :
1. * 600 db

Question Number : 34 Question Id : 873718154 Display Question Number : Yes Is Question Mandatory : No

For the operational amplifier circuit shown, the output saturation voltages are ± 15 V. The upper and lower threshold voltages for the circuit are, respectively,




Options:

Question Number : 35 Question Id : 873718155 Display Question Number : Yes Is Question

Mandatory : No

The amplifier circuit shown in the figure is implemented using a compensated operation amplifier (op-amp), and has an open-loop voltage gain, A_0 =105 V/V and an open-loop cut-off frequency, fc=8 Hz. The voltage gain of the amplifier at 15 kHz, in V/V is



Options:

1. 43.3 to 45.3


2. **48**.3 to 49.3

3. **4**7.3 to 49.3

4. **4** 46.3 to 47.3

Question Number : 36 Question Id : 873718156 Display Question Number : Yes Is Question Mandatory : No


The voltage gain Av of the circuit shown below is

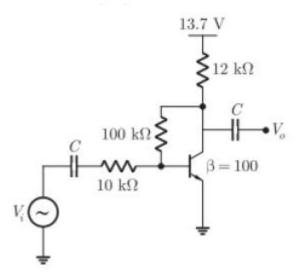

Options:

Question Number : 37 Question Id : 873718157 Display Question Number : Yes Is Question Mandatory : No

The amplifier shown below has a voltage gain of -25, an input resistance of 10 kW, and a lower 3-dB cut-off frequency of 20 Hz. Which one of the following statements is **true** when the emitter resistance R_E is doubled?

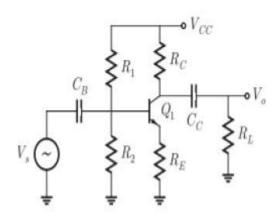


Options:

- 1. Collector bias current will increase
- 2. * Input resistance will decrease
- 3. Magnitude of voltage gain will decrease
- 4. ★ Lower 3-dB cut-off frequency will increase

Question Number : 38 Question Id : 873718158 Display Question Number : Yes Is Question Mandatory : No

The ideal opamp based circuit shown below acts as a _____

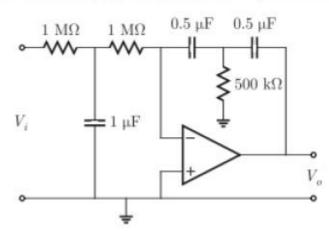

- 1. * high-pass filter
- band-pass filter
- 3. * band-reject filter
- 4. ✓ low-pass filter

Question Number : 39 Question Id : 873718159 Display Question Number : Yes Is Question

Mandatory : No

An ideal value of stability factor is _____?

Options:

- 1. 🗸 1
- 2. * 100
- 3. * 200
- 4. * 101

Question Number : 40 Question Id : 873718160 Display Question Number : Yes Is Question

Mandatory : No

Name the filter that has two pass bands?

Options:

- 1. Low pass filter
- 2. Band- reject filter
- 3. * High pass filter
- 4. * Band-pass filter

Question Number : 41 Question Id : 873718161 Display Question Number : Yes Is Question

Mandatory: No

$$A(A + B) = ?$$

Options:

1. * AB

		1
2	38	1

Question Number : 42 Question Id : 873718162 Display Question Number : Yes Is Question Mandatory : No

De Morgan's theorem states that _____

Options:

$$(A + B)' = A' * B$$

$$3. * A' + B' = A'B'$$

Question Number : 43 Question Id : 873718163 Display Question Number : Yes Is Question

Mandatory: No

expressions can be implemented using either (1) 2-level AND-OR logic circuits or (2) 2-level NAND logic circuits.

Options:

2. * Literals

4. * both POS and SOP

Question Number : 44 Question Id : 873718164 Display Question Number : Yes Is Question Mandatory : No


How much input and output needed for demultiplexer?

Options:

- 1. * Many inputs to one output
- 2. One input to many outputs
- 3. * One input to one output
- 4. * Many inputs to many outputs

Question Number : 45 Question Id : 873718165 Display Question Number : Yes Is Question Mandatory : No

For the device shown here, let all D inputs be LOW, both S inputs be HIGH, and the $\overline{\text{EN}}$ input be HIGH. What is the status of the Y output?



Options:

1. VLOW

- 2. * HIGH
- 3. * Don't Care
- Cannot be determined

Question Number : 46 Question Id : 873718166 Display Question Number : Yes Is Question Mandatory : No

How many 2:1 multiplexers are required to generate 2n:1 multiplexer?


Options:

- 1. * 2ⁿ
- 2ⁿ-1
- 2ⁿ+1
- 4. * 2ⁿ⁻¹

Question Number : 47 Question Id : 873718167 Display Question Number : Yes Is Question Mandatory : No

Consider a 4 bit Johnson counter with an initial value of 0000. The counting sequence of this counter is:


- 1, **3** 0, 1, 3, 7, 15, 14, 12, 8, 0
- 2. * 0, 1, 3, 5, 7, 9, 11, 13, 15, 0

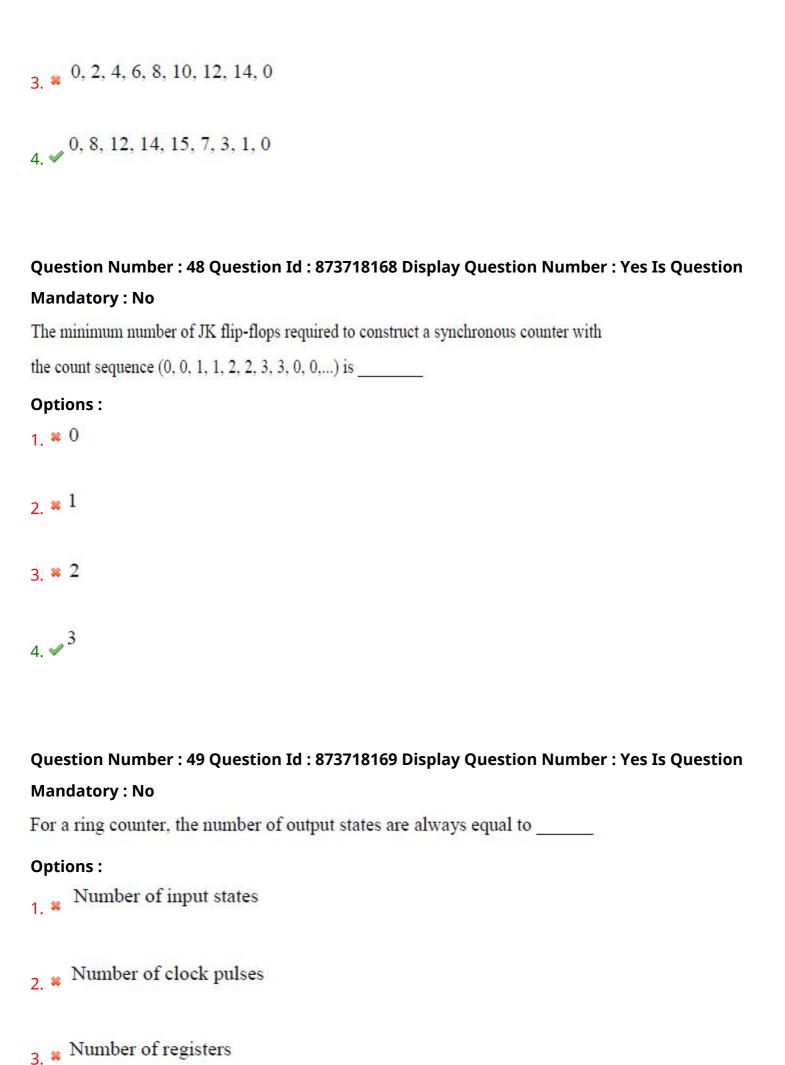

4. Number of flip flops

Question Number : 50 Question Id : 873718170 Display Question Number : Yes Is Question Mandatory : No

Consider the given circuit. In this circuit, the race around

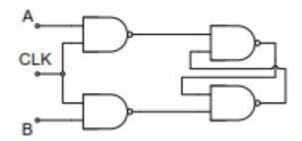

Options:

- Does not occur
- 2. * Occurs when CLK=0
- 3. * Occurs when CLK=1 and A=B=1
- 4. * Occurs when CLK=1 and A=B=0

Question Number : 51 Question Id : 873718171 Display Question Number : Yes Is Question Mandatory : No

Among the digital IC families ,ECL ,TTL and CMOS

- 1. FCL has the least propagation delay
- 2. * TTL has largest fan out

Question Number : 54 Question Id : 873718174 Display Question Number : Yes Is Question Mandatory : No

A microcontroller at-least should consist of:

Options:

1 . RAM, ROM, I/O ports and timers

2. * CPU, RAM, I/O ports and timers

3. CPU, RAM, ROM, I/O ports and timers

4. ★ CPU, ROM, I/O ports and timers

Question Number : 55 Question Id : 873718175 Display Question Number : Yes Is Question Mandatory : No

Which of the following are the components of a microprocessor?

Options:

1. * ALU

2. * Register array

3. Control unit

All the above

Question Number: 56 Question Id: 873718176 Display Question Number: Yes Is Question

Mandatory : No


The Fourier transform of a periodic waveform is **Options:** another periodic waveform 2. * continuous spectrum a periodic signal Question Number: 57 Question Id: 873718177 Display Question Number: Yes Is Question Mandatory: No Parseval's theorem is used to find **Options:** energy of a signal in time domain 2. v energy of a signal in frequency domain output of a system for impulse input 4. * output of a system for unit step input Question Number: 58 Question Id: 873718178 Display Question Number: Yes Is Question Mandatory: No

Convolution of two voltage pulses of amplitudes 1 Volt and width 1 sec is a

Options:

1. * rectangular pulse

Visit CollegeDekho

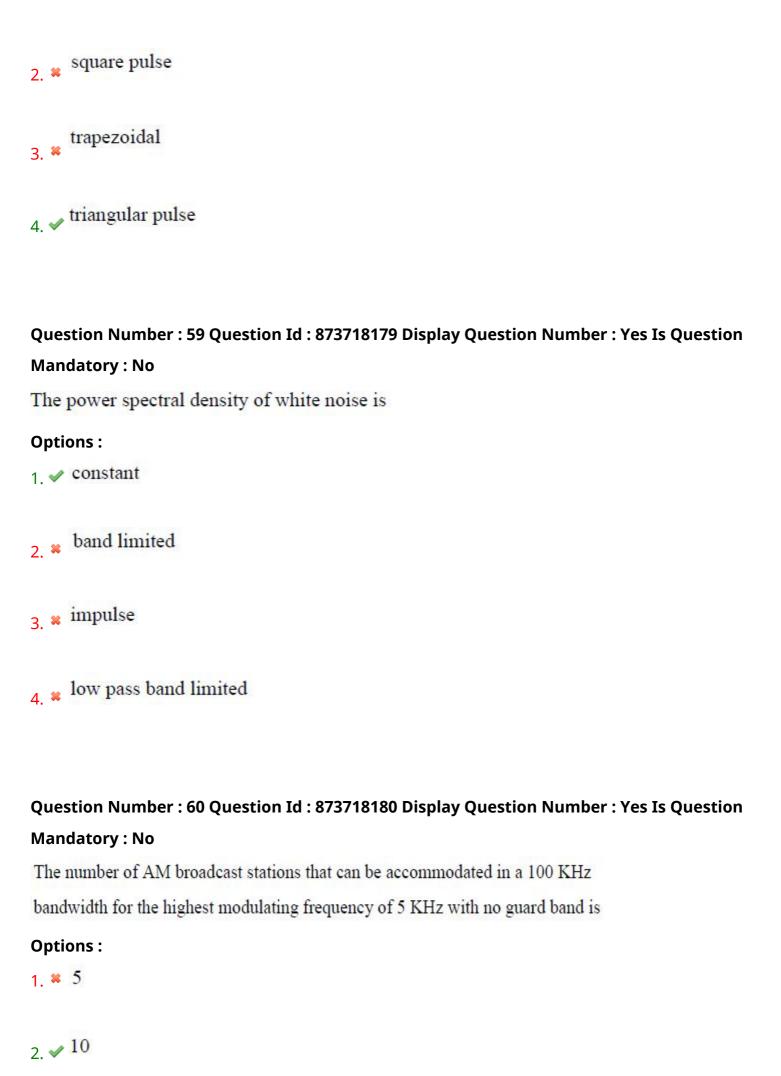



Question Number : 61 Question Id : 873718181 Display Question Number : Yes Is Question Mandatory : No

In an AM signal, the peak antenna current is 13 Amp and the minimum current is 7 Amp.

The percentage modulation is

Options:

Question Number : 62 Question Id : 873718182 Display Question Number : Yes Is Question Mandatory : No

In FM system, if the depth of modulation is doubled, the output power

- 1. * increases by a factor of 2
- 2. * increases by a factor of 3
- 3. * increases by a factor of 4


4. remains at unmodulated value
Question Number : 63 Question Id : 873718183 Display Question Number : Yes Is Question
Mandatory : No
The main advantage of super heterodyne receiver is
Options:
1. * simple circuit
2. * better tracking
3. w improvement in selectivity and sensitivity
4. * better alignment
Question Number : 64 Question Id : 873718184 Display Question Number : Yes Is Question
Mandatory: No An increase in the modulation index leads to increase in bandwidth in case of
Options:
1. * ^{AM}
2. ✓ FM
3. * PM
4. * PCM

Question Number : 65 Question Id : 873718185 Display Question Number : Yes Is Question
Mandatory : No
A PAM signal can be detected by
Options :
1. * band pass filter
2. * band stop filter
3. * high pass filter
4. ✓ low pass filter
Question Number : 66 Question Id : 873718186 Display Question Number : Yes Is Question
((
Mandatory : No
Mandatory : No
Mandatory: No As the sampling frequency is increased, the guard band becomes
Mandatory: No As the sampling frequency is increased, the guard band becomes Options:
Mandatory: No As the sampling frequency is increased, the guard band becomes Options: 1. ** smaller
Mandatory: No As the sampling frequency is increased, the guard band becomes Options: 1. ** smaller 2. ** remains same

Question Number : 67 Question Id : 873718187 Display Question Number : Yes Is Question

Mandatory : No

Visit CollegeDekho

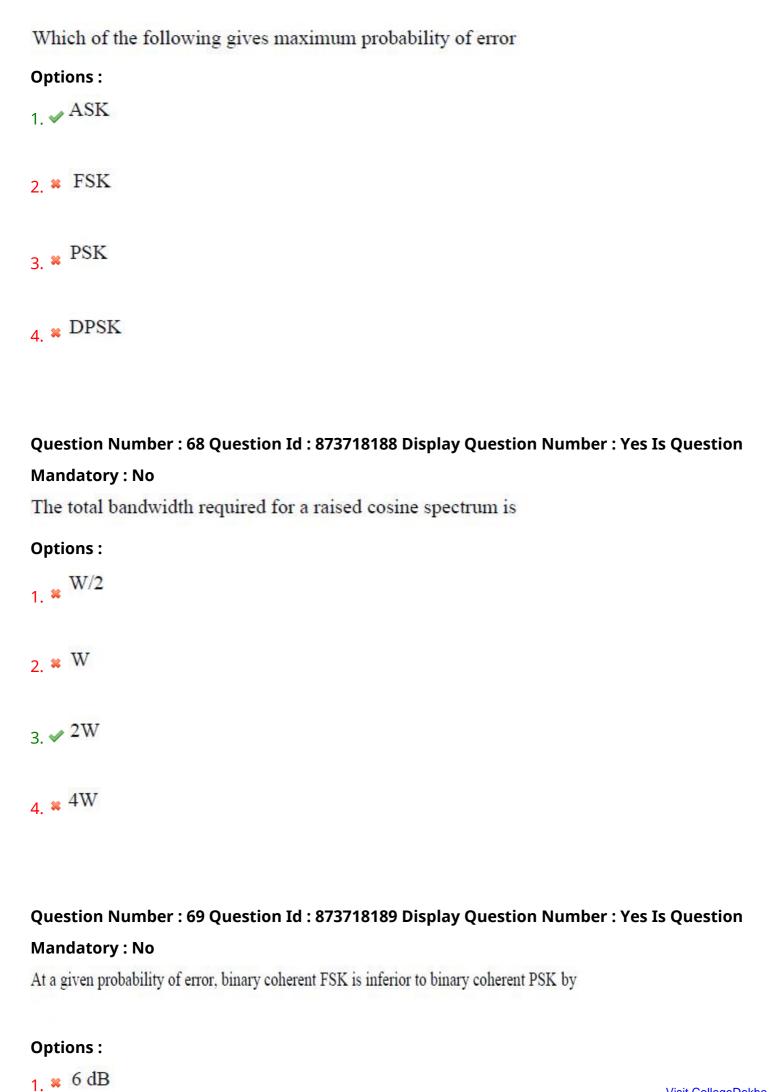

2. **≈** ³ dB
3. **✓** ² dB
4. **≈** ⁰ dB

Question Number : 70 Question Id : 873718190 Display Question Number : Yes Is Question Mandatory : No

A PAM signal can be detected by using


Options:

- 1. * an ADC
- 2. ✓ an integrator
- 3. * a BPF
- 4. * a HPF

Question Number : 71 Question Id : 873718191 Display Question Number : Yes Is Question Mandatory : No

The capacitive microphone is used for the detection of

- 1. * Heart rate
- 2. * Blood flow

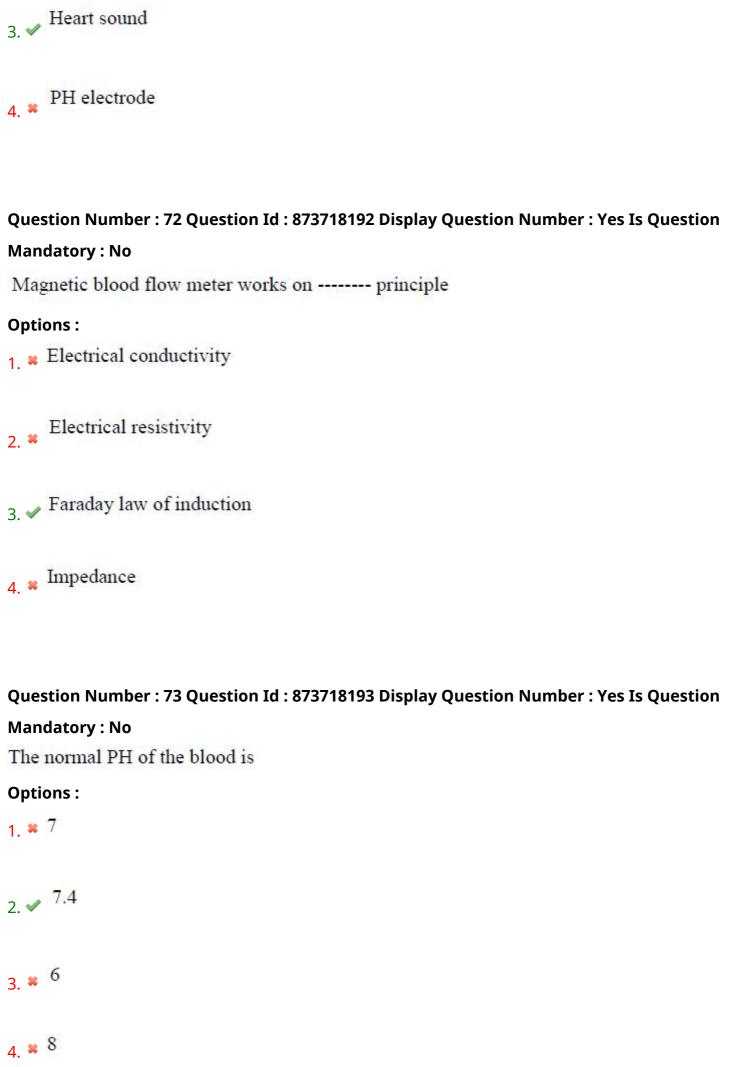

Question Number : 74 Question Id : 873718194 Display Question Number : Yes Is Question
Mandatory : No
is the closeness with which an instrument reading approaches the true value of
the variable being measured
Options:
1. ✓ Accuracy
2. * Isolation
3. * Linearity
4. * Stability
Question Number : 75 Question Id : 873718195 Display Question Number : Yes Is Question
Mandatory: No
An infrared LED is usually fabricated from
Options:
1. * GA
2. × Si
3. * GaAs
4. ✓ Ga As P

Question Number : 76 Question Id : 873718196 Display Question Number : Yes Is Question

Mandatory: No Parallax error is not present in **Options:** 1. * moving coil meter 2. * FET voltmeter 3. * Diode voltmeter 4. Digital voltmeter Question Number: 77 Question Id: 873718197 Display Question Number: Yes Is Question Mandatory: No The best method for precise measurement of low resistance is **Options:** 1. Wheatstone bridge 2. * Loss of charge method 3. * Ohm meter 4. * Kelvin double bridge Question Number: 78 Question Id: 873718198 Display Question Number: Yes Is Question Mandatory: No Which of the following optical transducers is an active transducer **Options:**


1. * Photo emissive cell
2. * Photo diode
3. * Photo transistor
4. ✓ Photo voltaic cell
Question Number : 79 Question Id : 873718199 Display Question Number : Yes Is Question Mandatory : No
A moving coil galvanometer is made into a DC ammeter by connecting
Options:
1. * a low resistance across the meter
2. * a high resistance in series with the meter
3. ✓ a pure inductance across the meter
4. * a capacitor in series with the meter
Question Number : 80 Question Id : 873718200 Display Question Number : Yes Is Question Mandatory : No
The Triac can be used as
Options:
1. * inverter
2. * rectifier

3. w multiquadrant chopper

cycloconverter

Question Number : 81 Question Id : 873718201 Display Question Number : Yes Is Question Mandatory : No

For the system shown in the figure, Y(s) / X(s) =

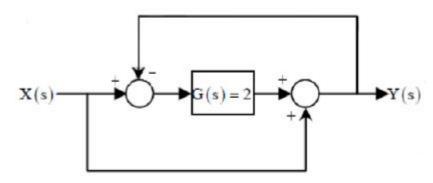

Options:

1. * 1


2. * 2

3. * 3


4. 🗸 4

Question Number : 82 Question Id : 873718202 Display Question Number : Yes Is Question Mandatory : No


The equivalent of the block diagram in figure is given as

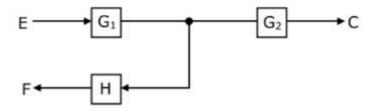


Options:

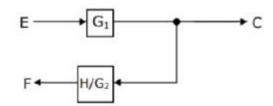


1. **

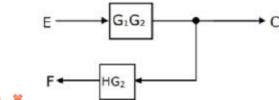

2. **

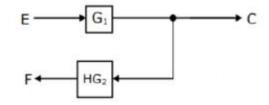

3

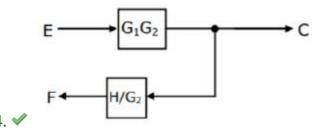

Question Number : 83 Question Id : 873718203 Display Question Number : Yes Is Question


Mandatory : No

For a second order system, damping ratio (ξ), is $0 < \xi < 1$, then the roots of the characteristic polynomial are

Options:

Real but not equal

2. * Real and equal

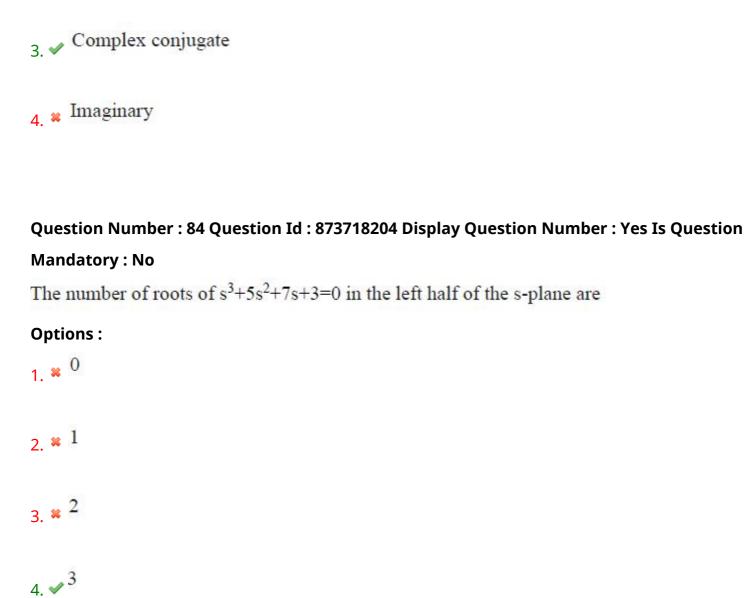

Mandatory: No

Options:

2. * 1.33

3. -1.33

4. * 4

1. * -4

loci with the real axis is

Question Number: 85 Question Id: 873718205 Display Question Number: Yes Is Question

Given the G(s)H(s)=K/s(s+1)(s+3), the point of intersection of the asymptotes of the root

Question Number : 86 Question Id : 873718206 Display Question Number : Yes Is Question Mandatory : No

In the Bode-plot of a unity feedback control system, the value of phase of $G(j\omega)$ at the gain cross over frequency is -125° . The phase margin of the system is

Options:

- 1. * -125°
- 2. ***** -55°
- 3. ✓ 55°
- 4. * 125°

Question Number : 87 Question Id : 873718207 Display Question Number : Yes Is Question Mandatory : No

A process with open-loop model, $G(s)=Ke-s\tau d/\tau s+1$, is controlled by a PID controller. For this process

- the integral mode improves transient performance
- 2 w the integral mode improves steady state performance
- 3 * the derivative mode improves transient performance
- 4 * the derivative mode improves steady state performance

Question Number : 88 Question Id : 873718208 Display Question Number : Yes Is Question

Mandatory: No

The open-loop transfer function of a plant is given as $G(s)=1/s^2-1$. If the plant is operated in a unity feedback configuration, then the lead compensator that can stabilize this control system is

Options:

2. *
$$G(s)=10(s+4)/s+2$$

$$G(s)=10(s+2)/s+10$$

$$_{4} \times G(s)=2(s+2)/s+10$$

Question Number : 89 Question Id : 873718209 Display Question Number : Yes Is Question Mandatory : No


Let x(t) be the input to a linear, time-invariant system. The required output is 4x(t-2).


The transfer function of the system should be

Question Number: 90 Question Id: 873718210 Display Question Number: Yes Is Question

Mandatory: No


Nyquist plot of two functions G1(s) and G2(s) are shown in figure.






Nyquist plot of the product of G1(s) and G2(s) is


Options:




1. 🗱 🛭





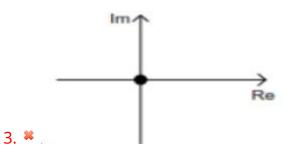

⊿ ¾



Question Number : 91 Question Id : 873718211 Display Question Number : Yes Is Question

Mandatory: No

The Mass spectrum is a plot of

Options:

- 1. * mass/charge
- 2. ✓ Ion abundance vs Mass/charge
- 3. * ion abundance
- 4. * electron motion

Question Number : 92 Question Id : 873718212 Display Question Number : Yes Is Question

Mandatory : No

The unit of spectrum measured in Mass Spectrometry is

- 1. Coulombs/ unit charge
- 2. # Hertz
- 3. * Daltons

4. Daltons / unit charge
Question Number : 93 Question Id : 873718213 Display Question Number : Yes Is Question
Mandatory : No
Mass spectrometer can be used to identify in the expired gas
Options:
1. * Oxygen
Nitrogon
2. * Nitrogen
3. * Carbon di-oxide
4. ✓ Gases other than O2, N2, CO2
Question Number : 94 Question Id : 873718214 Display Question Number : Yes Is Question
Mandatory : No
In a spectrophotometer for each wavelength setting, the reference is set by
Options:
1. * Sample itself
2. * UV lights
2. * O v lights
3. ✓ Black Cuvette
4. * Visible light


Question Number : 95 Question Id : 873718215 Display Question Number : Yes Is Question Mandatory : No
The absorption filters used in the spectrophotometer consists of absorption filters made up of
Options : 1. Gelatine
2. * Paper
3. * Wood
4. * Iodine
Question Number: 96 Question Id: 873718216 Display Question Number: Yes Is Question Mandatory: No The 2 types of wavelength selectors in spectrophotometers are
Options:
Glass filters and interference filters
2. * Glass filters and polarization filters
3. * Glass filters and prisms
4. * Glass filters and LEDs
Question Number : 97 Question Id : 873718217 Display Question Number : Yes Is Question

In Laser production the amount change of Energy state is a function of

Mandatory : No

Absolute temperature 1. **
2. * Valence electrons
3. * Velocity
4. ✓ Plank's constant
Question Number : 98 Question Id : 873718218 Display Question Number : Yes Is Question Mandatory : No
In an LED the holes lie in the band and the electrons lie in the band.
Options:
1. ✓ Valence, Conduction
2. * Valence, Insulation
3. * Valence, Inert
4. ** Conduction, Valence
Question Number : 99 Question Id : 873718219 Display Question Number : Yes Is Question
Mandatory: No A biomedical application of photodetector is
Options:
1. * MRI

Ultrasound 2. **
3. Pulse Oximeter
4. * ECG
Question Number: 100 Question Id: 873718220 Display Question Number: Yes Is Question
Mandatory : No
In a fiber optic cable the refractive index of the core is than that of the cladding
Options :
1. ✓ greater
2. * lesser
3. * almost equal
4. * equal
Question Number : 101 Question Id : 873718221 Display Question Number : Yes Is Question
Mandatory : No
For a multimoded graded index Fibre Optic cable the core diameters are
than that of the single mode fiber
Options :
1. ✓ greater
2. * lesser

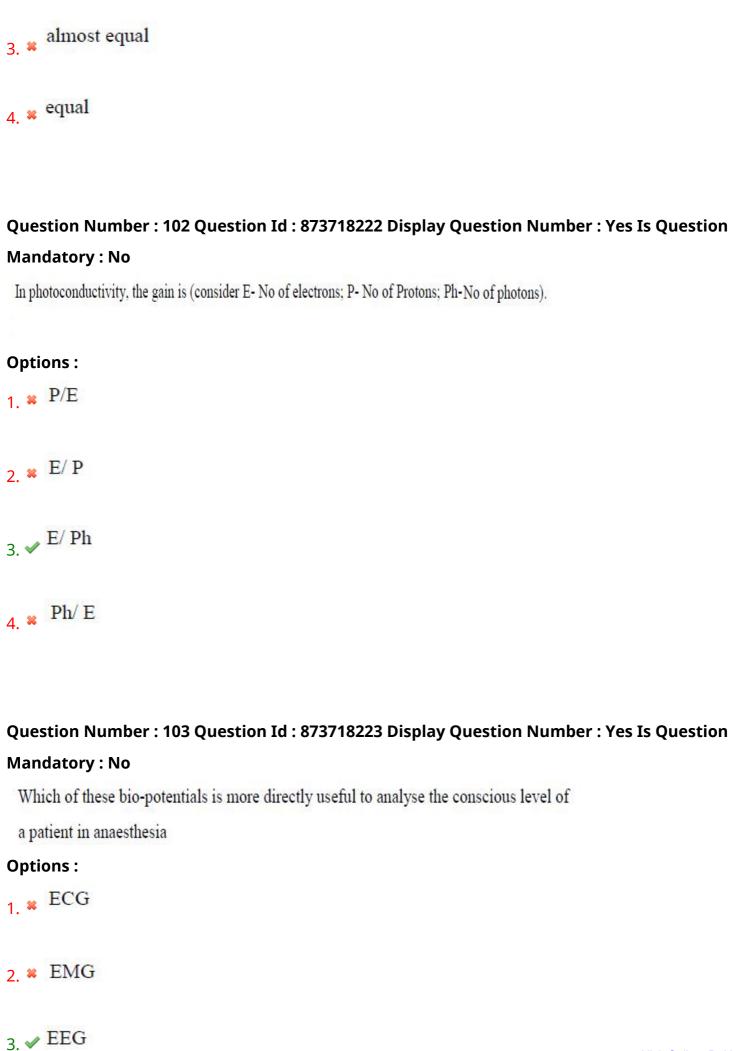

4	æ	PCG
→.		

Question Number : 104 Question Id : 873718224 Display Question Number : Yes Is Question Mandatory : No

Which of the EEG frequency relates to the REM sleep?

Options:

- 1. * Alpha
- 2. * Beta
- 3. V Theta
- 4. Delta

Question Number : 105 Question Id : 873718225 Display Question Number : Yes Is Question Mandatory : No

The Electrode Montage selector in an EEG machine selects ___ out of ___ electrode signals.

- 1. 48,20
- 2. * 1, 20
- 3. * 2, 20
- 4. * 16, 20

Question Number : 106 Question Id : 873718226 Display Question Number : Yes Is Question
Mandatory: No A blood vessel that enters the heart is a and that enters any other organ is
Options :
1. ✓ vein, artery
2. * artery, vein
3. * superior, inferior vena cava
4. * aorta, vein
Question Number : 107 Question Id : 873718227 Display Question Number : Yes Is Question
Mandatory : No
Mandatory: No The main pumping action of the heart is accomplished by and the
The main pumping action of the heart is accomplished by and the associated pressure is said to be
The main pumping action of the heart is accomplished by and the
The main pumping action of the heart is accomplished by and the associated pressure is said to be
The main pumping action of the heart is accomplished by and the associated pressure is said to be Options:
The main pumping action of the heart is accomplished by and the associated pressure is said to be Options: Arteries, Systolic
The main pumping action of the heart is accomplished by and the associated pressure is said to be Options: 1. ** Arteries, Systolic 2. ** Ventricles, Systolic

Question Number: 108 Question Id: 873718228 Display Question Number: Yes Is Question

The amplitude of ECG, EMG, EEG can be in the range of

Mandatory: No

Options:

1. ***** mV, μV, mV

2. **∞** mV, mV, μV

3. ***** μV, mv, μV

4. **μ**V, μV, μV

Question Number : 109 Question Id : 873718229 Display Question Number : Yes Is Question Mandatory : No

For EMG measurements to a muscle mass and a muscle fiber _____ and types of electrodes are respectively used.

Options:

Surface, Surface

2 V Surface, Needle

3. * Needle, Surface

4. * Needle, Coaxial

Question Number : 110 Question Id : 873718230 Display Question Number : Yes Is Question Mandatory : No

The prolonged QRS complex in ECG represents

Options:

1. * First degree Block

2. ✓ Bundle Block

3. * Fibrillation

4. * Defibrillation

Question Number : 111 Question Id : 873718231 Display Question Number : Yes Is Question Mandatory : No

Consider the linear system x + 2y + z = 3; ay + 4z = 8; x + 7y + az = b. The values of (a, b) for which the system has more than one solution are

Options:

Question Number : 112 Question Id : 873718232 Display Question Number : Yes Is Question Mandatory : No

For what values of λ the homogeneous system $(\lambda - 2)x + 4y = 0$; $4x + (\lambda - 2)y = 0$ has a nontrivial solution

Question Number : 113 Question Id : 873718233 Display Question Number : Yes Is Question Mandatory : No

$$\lim_{(x,y)\to(0,0)} \frac{-xy}{x^2+y^2}$$

Options:

Question Number : 114 Question Id : 873718234 Display Question Number : Yes Is Question Mandatory : No

$$\int_0^1 \int_y^{\sqrt{y}} dx \ dy \text{ is equal to}$$

$$\int_0^1 \int_{x^2}^x dy \ dx$$

$$\int_0^1 \int_{\sqrt{x}}^x dy \ dx$$

$$\int_0^1 \int_x^{x^2} dy \ dx$$

$$\int_0^1 \int_{\sqrt{x}}^{x^2} dy \ dx$$

Question Number : 115 Question Id : 873718235 Display Question Number : Yes Is Question Mandatory : No

Solution of $e^y dx + (xe^y + 3y^2) dy = 0$ is

Options:

$$1. \checkmark xe^y + y^3 = C$$

$$2. * ye^x + y^3 = C$$

$$3. \times xe^y + x^3 = C$$

$$ye^x + x^3 = C$$

Question Number : 116 Question Id : 873718236 Display Question Number : Yes Is Question Mandatory : No

The boundary value problem $\frac{d^2y}{dx^2} + 25y = 0$; $\frac{dy}{dx}(0) = 6$, $\frac{dy}{dx}(\pi) = -9$

- 1 * has exactly two solutions
- 2. * has infinitely many solutions
- 3. * has unique solution

Question Number : 117 Question Id : 873718237 Display Question Number : Yes Is Question Mandatory : No

Ms. Perez figures that there is a 30 percent chance that her company will set up a branch office in Phoenix. If it does, she is 60 percent sure that she will made manager of this new operation. The probability that Perez will be a Phoenix branch office manager is

Options:

- 1 * 0.25
- 2. 🗸 0.18
- 3. * 0.12
- 4. * 0.32

Question Number : 118 Question Id : 873718238 Display Question Number : Yes Is Question Mandatory : No

A binomial random variable has mean 5 and variance 4. The values of n and p that characterizes the distribution of this random variable are

$$n = 25, p = 0.4$$

$$n = 20, p = 0.2$$

$$n = 25, p = 0.2$$

$$n = 24, p = 0.2$$

Question Number : 119 Question Id : 873718239 Display Question Number : Yes Is Question Mandatory : No

$$f(z) = |z|^2$$
 is

Options:

- 1 * Differentiable everywhere
- 2. \checkmark Differentiable only at z = 0
- Differentiable for all z in |z| < 1
- 4. * Nowhere differentiable

Question Number : 120 Question Id : 873718240 Display Question Number : Yes Is Question Mandatory : No

Let $f(x) = x - e^{-x} = 0$. Consider the initial guess $x_0 = 1$ then the value of x_1 in Newton-Raphson method to find out the root of f(x) = 0 is